This Page Blank (uspto)

PCT

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : **G10L**	**A2**	(11) International Publication Number: **WO 94/25958** (43) International Publication Date: 10 November 1994 (10.11.94)

(21) International Application Number: PCT/DK94/00164

(22) International Filing Date: 22 April 1994 (22.04.94)

(30) Priority Data:
0464/93　　　　22 April 1993 (22.04.93)　　　　DK

(71)(72) Applicant and Inventor: LEONHARD, Frank, Uldall [DK/DK]; Louisevej 13, DK-2800 Lyngby (DK).

(74) Agent: PLOUGMANN & VINGTOFT A/S; Sankt Annæ Plads 11, P.O. Box 3007, DK-1021 Copenhagen K (DK).

(81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), ES, FI, FI (Utility model), GB, GE, HU, JP, KG, KP, KR, KZ, LK, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, SK (Utility model), TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published
Without international search report and to be republished upon receipt of that report.

(54) Title: METHOD AND SYSTEM FOR DETECTING AND GENERATING TRANSIENT CONDITIONS IN AUDITORY SIGNALS

(57) Abstract

　　The shape of energy changes of an auditory signal is used for identifying or representing features which can be perceived by a human ear as representing a distinct sound picture. In order to extract information from the shape of the energy changes, the shape is preferably being represented by the shape of a transient pulse of the signal. It is preferred that an envelope detection is being used in order to obtain the transient signal pulse. The energy change representing the distinct sound picture can be a phoneme or vowel. The invention also relates to a method for identifying the energy changes in the auditory signal by comparing the shape of energy changes of the signal, which can be represented as the shape of the transient pulse, with predetermined energy change shapes representing distinct sound pictures. The invention also relates to a method of speech synthesis wherein a series of transient pulses is generated corresponding to the series of phonemes to be synthesized. The invention further relates to a system for processing an auditory signal in order to reduce the bandwidth of the signal with substantial retention of the information of the signal, the system comprising means for extracting the transient component of the auditory signal, and means for detecting an envelope of the transient component. Such a system may be used as a pre-process system in an electronic system for speech or sound analysis. The methods and systems of the invention may be used within the fields of speech recognition, speech synthesizing, narrow band telecommunication, hearing aids, and quality measurement of audio products.

METHOD AND SYSTEM FOR DETECTING AND GENERATING TRANSIENT .
CONDITIONS IN AUDITORY SIGNALS

The present invention relates to a method and system for
signal processing, by which method and system features
5 representing distinct sound pictures in auditory signals are
extracted from transients in the auditory signals. The result
of the processing may be used for identification of sound or
speech signals or for quality measurement of audio products
or systems, such as loudspeakers, hearing aids,
10 telecommunication systems, or for quality measurement of
acoustic conditions. The method of the present invention may
also be used in connection with speech compression and
decompression in narrow band telecommunication.

In the prior art methods of signal analysing of auditory
15 signals, the signals are considered to be steady state over a
short time of period, and a form of short time spectral
analysis is used under this assumption.

The human ear has the ability to simultaneously catch fast
sound signals, detect sound frequencies with great accuracy
20 and differentiate between sound signals in complicated sound
environments. For instance it is possible to understand what
a singer is singing in an accompaniment of musical instru-
ments.

In prior art methods of signal analysis and in the method of
25 the present invention it is assumed that the cochlea in the
human ear can be regarded as an infinite number of bandpass
filters, IBP, within the frequency range of the human ear.

The time response f(t) for one bandpass filter due to an
excitation can be separated into two components, the
30 transient response, ft(t), and the steady state response,
fs(t),

(1) $f(t) = ft(t) + fs(t)$.

Traditional signal processing is based on the steady state response fs(t), and the transient response ft(t) is assumed to vanish very fast and to be without importance for the perception, see for example "Principles of Circuit

5   Synthesis", McGraw-Hill 1959, Ernest 5. Kuh and Donald O. Pederson, page 12, lines 9-15, where it is stated that:

"only the forced response is considered while the response due to the initial state of the network is ignored".

Thus, when students are introduced to the world of signal

10   analysis, they learn at a very early stage that the transient response, i.e. the response due to the initial state of the network should be ignored because it vanishes within a very short period of time. Furthermore, it is rather difficult to analyse these transient signals by use of traditional linear

15   methods of analysis.

The ability of the human ear to hear very short sounds and at the same time detect frequencies with great accuracy is in conflict with the traditional filterbased spectrum analysis. The time window (twice the rise time) of a bandpass filter is

20   inversely proportional to the bandwidth,

(2) $tw=2/(fu-fl)$

where fl is the lower cutoff frequency and fu is the upper cutoff frequency.

Thus, if a rise time of 5 ms is required the consequence is

25   that the frequency resolution is no better than 400 Hz.

As the detection of these transients is in conflict with a high frequency resolution, the detecting by the human ear of these transients must take place in an alternative manner. It has not been examined how the human ear is able to detect

30   these signals, but it might be possible that the cochlea, when no sounds are received, is in a position of rest, where

the cochlea will be very broad-banded. When a sound signal is received, the cochlea may start to lock itself to the frequency component or components within the signal. Thus, the cochlea may be broad-banded in its starting position, but

5   if one or more stable frequencies are received the cochlea may lock itself to this frequency or these frequencies with a high accuracy.

Today it is known that the nerve pulses launched from the cochlea are synchronized to the frequency of a tone if the

10 frequency is less than about 1.4 kHz. If the frequency is higher than 1.4 kHz the pulses are launched randomly and less than once per cycle of the frequency.

Signal analysis based on filter bank spectrum analysis is disclosed in GB 2213623 which describes a system for phoneme

15 recognition. This system comprises detecting means for detecting transient parts of a voice signal, where the principal object of the transient detection is the detection of a point where the speech spectrum varies most sharply, namely, a peak point. The detection of the peak points is

20 used for a more precise phoneme segmentation. The transient analysis of GB 2213623 is based on a spectrum analysis and the change in the spectrum, which is very much different to the transient analysis of the present invention which is based on a direct transient detection in the time domain.

25 The present invention is based on an approach which is different in principle from all known methods for analysing auditory signals. According to the invention it has been found that the signal information relevant to the identification of the auditory signal is present in the

30 transient component of the signal. Thus, the method of the present invention involves a separation of the transient component or response of the auditory signal, a generation of a transient pulse corresponding to the transient component, and analysis of the shape of the pulse. In an auditory

35 signal, the corresponding transient pulse may be repeated

with time intervals, and the time interval of these periodic transient pulses is normally also analysed or determined.

In real life the human ear reacts to energy changes at high frequencies in order to recognize phonemes or sound pictures.
5 But in the present method transient pulses corresponding to the energy changes observed by the ear are extracted at these high frequencies, whereafter the transient pulses preferably are transformed to the low frequency range still maintaining the distinct features of the sound pictures or phonemes.
10 Thus, by using the principles of the invention, it is possible to obtain distinct features within auditory signals by examining the transformed low frequency signals.

As will be understood from the following explanation of the method of the invention, the concept of extracting transient
15 waveforms or shape of pulses makes it possible to use pre-process methods which are much simpler than the best designs presently used and at the same time obtain much more valuable information with respect to the auditory input signals.

In its broadest aspect, the invention relates to the use of
20 the shape of energy changes of an auditory signal for identifying or representing features which can be perceived by an animal ear such as a human ear as representing a distinct sound picture.

Before entering into a more detailed explanation of features
25 of the method of the invention, a few definitions will be given:

In short time analysis the transient component in a signal is a matter of definition. The idea is to obtain an expression that gives a response corresponding to the response in the
30 cochlea to an abrupt change in the signal energy. An abrupt change in the signal energy corresponds to the transient component in the auditory signal. Thus, in the present context, the term "transient component" designates any signal

corresponding to an abrupt energy change in an auditory
signal. The transient component holds the signal information
to be analysed and in order to analyse this information the
transient component may be transformed to a corresponding

5   transient pulse having a distinct shape. Thus, in the present
context, the term "transient pulse" refers to a pulse having
a distinct shape and substantially holding the information of
the transient component of the auditory signal and thus
corresponding to an abrupt change in the energy of the

10 auditory signal. As mentioned above the transient part of a
sound signal may be repeated with time intervals and thus, in
the present context, the term "periodic" when used in
combination with a transient component, response or pulse
designates any transient component, response or pulse being

15 repeated with intervals.

The term "shape" designates any arbitrary time-varying
function (which is time-limited or not time-limited) and
which, within a given time interval Tp has a distinctly
different amplitude level in comparison with the amplitude

20 level outside the interval. Thus, Tp is the duration of the
shape function when the shape function is time-limited, or
the duration of the part of the function which has a
distinctly different amplitude level in comparison with the
amplitude level outside the time interval. As will be

25 understood, the identification of the shape of a pulse is
suitably performed by observing the amplitude of the pulse
along the time axis of the pulse.

In order to extract information from the shape of the energy
changes, one broad aspect of the invention relates to

30 represent the shape of the energy changes by the shape of a
transient pulse of the signal. However, several methods can
be applied in order to obtain a transient pulse corresponding
to the change in energy, but is is preferred that an envelope
detection is being used, where the envelope preferably should

35 be detected from a transient response of the energy change in
the auditory signal.

The energy change representing the distinct sound picture can be a phoneme or vowel or any other sound which gives a sudden energy change in an auditory signal.

It is also an aspect of the invention to provide a method for
5 identifying, in an auditory signal, energy changes which can be perceived by an animal ear such as a human ear as representing a distinct sound picture, the method comprising comparing the shape of energy changes of the signal with predetermined energy change shapes representing distinct
10 sound pictures. For the identification it is preferred that the shape of the energy changes are represented by the shape of a transient-pulse of the signal, and it is furthermore preferred that the shape of the transient pulse should be obtained by an envelope detection of a transient response of
15 the energy change in the auditory signal.

The invention also relates to a method for processing an auditory signal so as to reduce the bandwith of the signal with substantial retention of the information of the signal, comprising extracting the transient component of the auditory
20 signal and detecting an envelope of the transient component. It is preferred that transient pulse shapes of the signal which can be perceived by an animal ear such as a human ear as representing a distinct sound picture are identified.

It should be noted that the pulse rise time or the form of
25 the leading edge, the duration of the pulse, and the fall time or the form of the lagging edge are all important features for identification of the pulse. In a preferred embodiment of the invention the shape of the leading edge of a pulse is identified, and it is also preferred that the
30 shape of the leading edge is determined by determining rise time, slope and/or slope variation of at least part of the leading edge.

In a preferred embodiment of the invention, the rise time, slope and/or slope variation of at least the top part of the

leading edge is determined, since the upper part of the pulse
should contain the necessary information. The top part may be
defined as the part beginning substantially at a point where
the slope is maximum. The top part may also be the part
5   corresponding to the upper 50% of the amplitude of the pulse.

When determining the shape of the pulse several metods may be
used, but in a preferred embodiment the rise time, slope
and/or slope variation of the leading edge is determined on
the basis of at least 5 samples. However any other suitable
10   number of samples may be used. Another preferred method of
identification of the shape of the leading edge may be
performed using comparison with a library of references.
Here, the references with which comparison is made could be
selected on the basis of the rise time of the leading edge.

15   It is also preferred to perform an identification of the
duration of the pulse, where the duration of a pulse can be
determined as the distance from the leading edge to the
lagging edge at a predetermined amplitude.

As should be understood, it is also preferred to identify the
20   shape of the lagging edge of the transient pulse.

The method of the present invention provides an expression
for the transient conditions of the auditory signal. The
method comprises a bandpass filtration of an auditory signal
within the frequency range of the human ear and a detection
25   of a lowpass filtered envelope, which envelope then can be
analysed with known methods of signal analysis. The envelope
is an expression of the transient part of the signal.

The known method of signal analysis, which should be used
when analysing the envelope, and the characteristics of the
30   bandpass filter, which should be selected, will depend on the
purpose of the analysis. The purpose may be speech
recognition, quality-measurement of audio products or
acoustic conditions, and narrow band telecommunication.

The invention also relates to a system for processing an
auditory signal to reduce the bandwith of the signal with
substantial retention of the information of the signal,
comprising means for extracting the transient component of

5   the auditory signal, and means for detecting an envelope of
the transient component.

Embodiments and details of the system appear from the claims
and the detailed discussion of embodiments of the system
given in connection with the figures and a mathematical

10   description of an embodiment of the system.

The invention will now be described in further detail in
connection with a mathematical description of the principle
of the invention and in connection with the drawing.

Fig. 1 shows the spectre of a bandpass filter $F(\omega)$ and a

15   lowpass filter $H(\omega)$,

Fig. 2 shows the zeros and the poles in the s-plane for an
infinite number of bandpass filters, IBP, having identical
bandwidth,

Fig. 3 shows the zeros and poles in the s-plane for an

20   infinite number of bandpass filters, IBP, having identical Q,

Fig. 4 illustrates the impulse response for various root
locations in the s-plane,

Fig. 5 shows a spectrogram for the words "linear prediction",

Fig. 6 illustrates how a summation of an infinite number of

25   bandpass filters, IBP, can be performed by one bandpass
filtration,

Fig. 7 illustrates the principle of a transient detection
system according to the invention,

Fig. 8 shows a block diagram for a transient detection system
according to the invention,

Fig. 9 shows the characteristics of a preferred highpass
filter to be used in the system of Fig. 8,

5   Fig. 10 shows the characteristics of a preferred lowpass
filter to be used in the system of Fig. 8,

Fig. 11 illustrates the sensitivity of the human ear,

Fig. 12 illustrates average formant frequencies for the
American vowels /i(:)/, /æ(:)/, /a(:)/, and /u(:)/,

10   Fig. 13 shows the experimental results of the first transient
analysis of the vowels of Fig. 11,

Fig. 14 shows processed curves of the vowel "i" as in "heat",

Fig. 15 shows similar curves as in Fig. 12 for the vowel "o"
as in "hop",

15   Fig. 16 shows normalized time windows for the processed
curves of the vowel "i" as in "heat",

Fig. 17 shows normalized time windows for the vowel "o" as in
"hop",

Fig. 18 shows normalized time windows for the vowel "a" as in
20   "have",

Fig. 19 shows a block diagram for a speech recognition system
according to the invention, and

Figs. 20-25 show transient pulses for speech synthesis of the
phonemes "i" as in "heat", "o" as in "hop", "o" as in
25   "ongaonga", "u" as in the Danish word "hus", "ø" as in the

Danish word "øse", and "y" as in the Danish word "lys",
respectively.

First, a mathematical explanation of the principles of the
invention is given.

5   A bandpass filter may be represented in the time domain by an
impulse response and can be expressed as

(3) $f(t) = h(t) \cos(\omega_c t)$

where $h(t)$ is the impulse response for a lowpass filter and
ω_c is the centre frequency of the bandpass filter $f(t)$. The
10   term $\cos(\omega_c t)$ may be regarded as representing a frequency
shift of the lowpass filter to a bandpass filter with a
centre frequency at ω_c. This is illustrated in Fig. 1, where
$F(\omega)$ and $H(\omega)$ are the corresponding frequency characteristics
of $f(t)$ and $h(t)$.

15   Let the IBP filters be composed of a simple bandpass filter,
BP, with a zero at origin and two complex poles
(complementary) in the left half plan of the complex s-plane
and let the poles of the IBP filters be placed in a straight
line then:

20   1) If the bandwidth is identical for all the IPB filters then
the rise time and the delay time will be identical for all
filters but Q=fc/(fu-fl) will be inversely proportional to
the centre frequency fc. The zeros and the poles are shown in
Fig. 2.

25   2) If Q is identical for all filters then the rise time and
the delay time will be inversely proportional to the centre
frequency while the bandwidth will be proportional to the
centre frequency. The zeros and the poles are shown in Fig.
3.

It is assumed that the rise time and the delay time are identical for the IBP filters within the frequency range which is of interest for the analysis of the transient conditions. If this is not the case it is assumed that the

5   brain will compensate for it. The effect is only that the rise time will be slower and the delay time will be longer with falling frequencies (if Q is identical). The rhythm and the shape of the transients will be the same.

In short time analysis the transient component in a signal is

10   a matter of definition. The idea is to get an expression that gives a response corresponding to the response in the cochlea to an abrupt change in the signal energy. An abrupt change in the signal energy corresponds to the transient component in the auditory signal.

15   The composition of the transient and the steady state component in a signal may be identified by envelope detection, where the steady state component is the DC component in the detected envelope and the transient component is identified as the changes in the level of the

20   envelope.

The transient response may be identified by envelope detection.

The envelope of the impulse response can be expressed as

(4) $ft(t) = [f(t)^2 + \hat{f(t)}^2]^{1/2}$

25   where $\hat{f}(t)$ is the Hilbert transform of $f(t)$.

By substituting (3) into (4) we have

(5) $ft(t) = \{[h(t)\cos(\omega_c t)]^2 + [\widehat{h(t)\cos(\omega_c t)}]^2\}^{1/2}$

For the Hilbert transform we have

(6) $\widehat{u(t)v(t)} = \widehat{u(t)}v(t) = u(t)\widehat{v(t)}$

if the spectra for u(t) and v(t) do not overlap.

Hence we have

(7) $ft(t) = \{[h(t)\cos(\omega_{cs}t)]^2 + [h(t)\sin(\omega_c t)]^2 \}^{1/2}$

and

(8) $ft(t) = |h(t)|$

based on the assumption that the spectrum for h(t) does not
overlap the centre frequency ω_c. Under this condition the
envelope of the impulse response is independent of the centre
frequency. This is illustrated in Fig. 4 which shows how
different impulse responses will result in the same envelope.

The result of (8) causes the total envelope for the IBP
filters to be the sum of the envelopes for the individual
bandpass filters.

An accumulated transient response ftt(t) can thus be
expressed by summing ft(t). This summation can be expressed
as

(9) $ftt(t) = \int_{\omega_{cl}}^{\omega_{cu}} ft(t,\omega_c)\,d(\omega_c)$

and

(10) $ftt(t) = |h(t)|(\omega_{cu} - \omega_{cl})$,

where ω_{cl} is the centre frequency for the lower IBP filter
and ω_{cu} is the centre frequency for the upper IBP filter.

13

Fig. 5 shows a spectrogram for the words "linear prediction"
when pronounced by a man. The spectrogram is recorded with
bandpass filters with a bandwidth of 300 Hz and centre
frequencies in the range from about 150 Hz up to about 4 kHz.
5   The ordinate is the frequency, the abscissa is the time and
the black ink is a degree of the signal energy. The
horizontal oriented black bands are dominating frequency
bands in the speech and are called formants. The vertical
thin lines correspond to abrupt energy changes and thus to
10   the transient components of the signal. A spectrogram is
usually used for formant analysis and a bandwidth of 300 Hz
is not sufficient for transient analysis, but the appearance
of the shape of the lines confirm that the transient signal
is independent of the centre frequency of the bandpass
15   filters.

As mentioned above the cochlea may be regarded as having an
infinite number of bandpass filters, but it would be
advantageous to be able to detect the transient signal
without the use of a large number of bandpass filters.

20   Fig. 6 illustrates how a summation of an infinite number of
bandpass filters, IBP, can be performed by one bandpass
filtration, BP, having a bandwidth that covers the cutoff
frequencies of the lower and the upper IBP filter, IBP_1 and
IBP_u. Preferably, the bandpass filter BP should be of the
25   maximum flat delay type, as this type of filter is well
suited for preserving the shape of a transient condition.

In practice the simplest way to detect the envelope is to use
a rectifier and a lowpass filter, see for example
"Communication Systems. An introduction to Signal and Noise
30   in Electrical Communication", McGraw-Hill Kogakusha 1968, A.
Bruce Carlson. From equation (10) it can be seen that the
accumulated transient component may be detected by performing
a highpass filtration, BP, covering the range of IBP that
needs to be accumulated before the envelope detection. An
35   envelope detection corresponds to a frequency shift by the

14

centre frequency ω_c of the bandpass filter to a lowpass
filter with half the bandwidth of the bandpass filter. This
means that the cutoff frequency of the lowpass filter
determines the bandwidth of all the IBP covered by the BP.

5   This principle is illustrated in Fig. 7.

In Fig. 7 the digitalized sound signal S(t) enters a bandpass
or highpass filter BP, 10, the output of the bandpass filter
is input into a rectifying unit 11, the output of which is
input into a lowpass filter LP, 12. The output of the lowpass

10   filter 12 is designated ftt(t) and represents a detection of
the envelope and thus a detection of the transient response
of the sound signal S(t).

From the mathematical definition of a transient part of a
signal it can be concluded that the poles of h(t) will be

15   located on the negative reel axis in the s-plane. This means
that the impulse response will not be oscillating around zero
(a transient response is a non oscillating signal). From
equation (10) it can be seen that the limits ω_{cu} and ω_{cl} for
the IBP filters is only a question of quantity of ftt(t).

20   The bandpass filtration, BP, sets the limits for the
summation of the transient responses of the IBP filters, and
the amplitude characteristic weights the contribution from
the IBP filters. If a lowpass filter is used instead of BP,
there will be an overlap of the spectrum for h(t) and the

25   centre frequency for the lower IPB filter. The bandpass
filter BP should have a band width which at least equals the
double of the cutoff frequency of the lowpass filter LP. The
band width and the amplitude characteristic can be utilized
for optimizing different signal analyses when using the

30   method according to the invention.

In principle the poles of the lowpass filter LP should be
located on the negative reel axis for a mathematical
transient detecting system. However, when dealing with
auditory signals, it is the characteristic of the cochlea

which is decisive; but there should preferably be no
significant oscillations within the impulse response, as this
could make the transient conditions of the auditory signal
more indistinct.

5   The cutoff frequency of the lowpass filter LP is an
    expression for the transient conditions of the signal, and
    this frequency should in connection with auditory signals
    result in a rise time corresponding to the rise time of the
    cochlea. The cutoff frequency may be regarded as an index of
10 transients, where a low cutoff frequency will result in
    transient detection of only those signal elements having a
    slow rise time, and where a high cutoff frequency also will
    result in detection of signal elements having a fast rise
    time.

15 The fact that the nerve pulses from the ear are synchronized
    to the frequency below about 1.4 kHz and not above indicates
    that the ear is tone oriented below 1.4 kHz and transient
    oriented above. In the transient oriented area the nerve
    pulses are synchronized to transients, corresponding to
20 abrupt energy changes, in the signal.

    The cutoff frequencies for the BP should correspond to the
    transient sensitive range for the cochlea (theoretically it
    should have an amplitude characteristic corresponding to the
25 sensitive curve for the ear). The sensitivity curve for the
    human hearing indicates that the lower cutoff frequency must
    be about 2 kHz and the upper about 5 kHz. The amplitude
    characteristic for the BP filter will weight the
    contributions from the individual IBP filters.

30 From the above discussion a transient detection and analysis
    system according to the invention may be constructed as shown
    in the block diagram of Fig. 8. In Fig. 8 a sound signal is
    input into a microphone 13 the output of which is passed
    through a lowpass filter 14 before being digitalized by an
35 A/D converter 15. The output of the A/D converter S(t) is

lead to a highpass or bandpass filter BP, 10, the output of
the bandpass filter is input into a rectifying unit 11 the
output of which is input into a lowpass filter LP, 12, see
also Fig. 7. The output of the lowpass filter 12 is

5   designated ftt(t) and represents the transient components of
the input signal. In order to analyse the transient
components, the output signal of the lowpass filter 12 should
preferably be lead into equipment for signal analysis or
recognition 16.

10   Figs. 9 and 10 show the characteristics of a preferred
highpass filter and lowpass filter to be used in the systems
of Figs. 7 or 8. The bandpass filter BP to be used as the
highpass filter 10 in Figs. 7 or 8 should have a lower cutoff
frequency of at least 2000 Hz, preferably about 3000 Hz. The

15   upper cutoff frequency should be in the range between 4500
and 7000 Hz, preferably about 6000 Hz. The characteristic
shown in Fig. 9 has a lower cutoff frequency of 3014 Hz. The
lowpass filter LP to be used in Figs. 7 or 8 should have a
higher cutoff frequency in the range of 400-1200 Hz,

20   preferably about 700 Hz. The characteristic shown in Fig. 10
has a higher cutoff frequency of 732 Hz. It would also be
possible to construct a transient detection system according
to Figs. 7 or 8 by using a full-wave rectifier. However, it
is preferred to use a one-way rectifier as illustrated in

25   Figs. 7 and 8.

In Fig. 11 the sensitivity of the human ear is illustrated as
the response of the cochlea on auditory signals for tones is
shown. As already mentioned the perception is tone oriented
up to about 1.4 kHz and transient oriented above 1,4 kHz.

30   As mentioned above and illustrated in Fig. 6 the total
envelope for the IBP filters is obtained by a summation of
the envelopes of the individual bandpass filters, and the
summation of an infinite or high number of bandpass filters
IBP can be performed by one bandpass filtration BP. This

35   principle is used in the diagram shown in Fig. 7. However, a

summation of a number of bandpass filters may also be
realized by using a filter bank method in which the envelopes
of a number of individual bandpass filters are detected and
summed. Thus, each branch within the filter bank is composed
5   of a bandpass filter with a specific centre frequency, a
rectifying unit and a lowpass filter, and the outputs of the
lowpass filters are summed in order to obtain the total
envelope.

Now, some introductory experiments illustrated by Figs. 12
10 and 13 will be discussed:

Two experiments were carried out in order to evaluate the
cutoff frequencies for the BP and the LP filters and to
evaluate the suitability of the method for speech
recognition.

15 1. Experiment by listening to an amplitude modulated signal

To have a first indication of the cutoff frequency for the LP
filter under controlled conditions, a listening experiment
was carried out with an amplitude modulated signal in the
sensitive frequency range for the ear. The experiment is
20 somewhat artificial because normally there would not be so
intensive a signal in that range and it can not be
recommended to verify the experiment because it is very hard
to the ear.

The carrier frequency was chosen to 3.5 kHz and the
25 modulation tone was tuned up from a few Hz and upwards. Until
350 - 400 Hz the envelope signal sounds buzz. After that it
sounds first like a hollow /u(:)/ and at 800 Hz like a sharp
/i(:)/. Above 800 Hz it was not possible to hear the envelope
signal. If the tone is increased further at a given point one
30 will hear different mixed tones.

The sound was of course dominated by the carrier frequency but it was indicated that the cutoff frequency for the LP filter probably has to be less than 1-1.2 kHz.

The modulation index was about 0.75. When it is greater than

5   1, the introduction of overtones can be observed.

2. Analysis of transient signals for four vowels

Selection of vowels:

Fig. 12 shows average formant frequencies for the American vowels /i(:)/, /æ(:)/, /a(:)/, and /u(:)/ as in heed, had,

10   hod, and who'd for men, women, and children. These vowels represent a good dispersal among vowels so they were selected to the experiment.

The vowels were recorded (with Danish accent) pronounced of a man, a woman, and a child by an ordinary cassette recorder.

15   Setup for the experiment:

An analog TSD (Transient Signal Detector) was designed in accordance with Fig. 7. The design was based on the operational amplifier LM 833.

The specification for the filters were:

20   The BP filter was a four orders Chebyshev filter with 1 db ripple. The upper cutoff frequency is about 6.5 kHz and the lower is adjustable from about 550 Hz to 2.6 kHz.

The rectifier was a full rectifier that converts the negative signal and adds it to the positive signal.

25   The LP filter was a two orders Butterworth filter designed to have a cutoff frequency at 1.5 kHz (the 3 db cutoff frequency was measured to 2.1 kHz).

19

Recording vowels and detecting the transient signal:

Four vowels pronounced by a man, a woman, and a child were
recorded on an ordinary radio cassette recorder. The
transient signal was detected by means of the TSD, converted,
5   and stored on PC by means of an 8 bits A/D converter. The
sampling rate when recording was 10 kHz, but when analysing
the recorded data only every second set of values was
considered, resulting in a sampling rate of 5 kHz. An 8 bits
A/D converter gives a poor dynamic range and therefore it was
10   necessary to record the vowels isolated (that means not in a
word) and this gives a more uncertain pronunciation.

Figs. 13a-13p show the experimental results of the first
transient analysis of the vowels of Fig. 12.

It is possible to identify the vowel by listening to the
15   transient signal. By visual inspection of time variation of
the results it could be observed that the same vowel
pronounced by a man, a woman, and a child, respectively, was
having almost the same characteristics, even if differences
in the fundamental tone were observed. When recording the
20   vowel /a(:)/ as in the Danish word "op", a p-sound was also
recorded which is clearly seen from the time variation of the
transient signal.

Analysis of the transient signals:

The power in the transient signals varies a lot from vowel to
25   vowel. The signals of the vowels /a(:)/ and /u(:)/ were very
low (especially for the man's voice) and it was necessary to
turn up the volume for the radio cassette recorder to a high
level and it caused a lot of noise.

First, there were made a number of FFT analysis of 20 ms
30   duration and a 5 Khz sampling rate at different starting
points in the vowels. The spectra appear to be <u>very</u>

outstanding and identical throughout the vowel. This strongly
indicates that there is important information in the signal.

In order to analyse common features 20 ms (101 samples) were
randomly chosen from each vowel. The time signals were

5 smoothed by a Hamming window and the FFT's were calculated.
In Figs. 13a-13d the power spectra are shown where the three
voices are illustrated in the same diagram for each vowel and
the corresponding transient signals are shown separately in
Figs. 13e-13h when pronounced by a woman, in Figs. 13i-13l

10 when pronounced by a man and in Figs. 13m-13p when pronounced
by a child.

The spectra are expected to have the following features:

The spectra of the same vowel pronounced by three different
voices will have some common features related to the vowel

15 and some features related to the voice.

The spectra of different vowels pronounced by the same voice
will have some features related to the different vowels and
some common features from the voices.

Furthermore, it must be expected that the shape of the
20 spectra plays a more important part than the absolute
frequencies.

From the power spectra the following can be seen:

/i(:)/ (Fig. 13a)

The most remarkable feature is that the spectra from all
25 three have an outstanding top in the frequency range from
300-400 Hz, they are 50 Hz wide, and there are an outstanding
cleft at 200-250 Hz. Furthermore, there is a contribution at
50 Hz. The man's voice has a contribution at 150 Hz which
must attribute to a deep voice.

/æ(:)/ (Fig. 13b)

The voices of the woman and of the man have an outstanding
cleft at 350 Hz (deeper than 50 db). The mans voice has also
in this case a contribution at 150 Hz. The voice of the child
5   does not fit so well into the pattern, this might perhaps be
due to an uncertain pronunciation.

/a(:)/ (Fig. 13c)

All three voices have top 250-300 Hz. The frequency range is
a bit lower and not so outstanding as for the /i(:)/.
10   Further, there is major contribution at 50 Hz and below for
all three voices.

/u(:)/ (Fig. 13d)

The voices of the child and of the woman are real alike and
they have a peak at 300 and 350 Hz and they have a deep wide
15   valley at 100 Hz. The man's voice has also a peak and the
valley is as wide as it is for the woman and the child but
not so deep. The reason for this can be the deep voice and
the fact that there is a lot of noise in the signal caused by
the radio cassette recorder.

20   The experiments leading to the results of Figs. 13a-p can be
seen as introductory but the results are highly interesting
especially when taking into consideration the simple
equipment that has been used with a lot of noise and only 8
bit A/D-converter. In spite of this the results are
25   outstanding. There has been no particular data selection to
improve the results and there is therefore no doubt that the
transient condition is of decisive importance for speech
recognition.

It seems like all information might be located in the
30   frequency range below 500 Hz. If this is the case then the
demand on the sampling frequency will be less than 1.5 kHz

and it will be possible to analyse the speech signal very
intensively with more parallel processes. It is possible to
have more time windows for instance 5, 20, and 40 ms and use
spectrum analysis (FFT, LPC, CEPSTRUM, or others) to detect

5   some phonemes and time analysis (correlation or methods) to
detect others phonemes.

It is most likely that a more sophisticated design of the TSD
with an AGC amplifier as preamplifier and a logarithmic or
AGC amplifier after the BP filter in order to compensate for

10   variations in the energy of the bandpass filtered phonemes,
will allow very good results to be obtained and cause a very
robust speaker independent speech recognition. Better results
may be obtained if a 12 or 16 bit A/D converter is used
instead of the 8 bit A/D converter.

15   Further experimental results illustrated in Figs. 14-18 will
be discussed in the following:

The method of extracting transient signal components
according to the present invention may also be regarded as a
pre-process of the auditory input signal. In order to be able

20   to obtain a better understanding and/or determination of the
parameters of the pre-process a software programme were
developed, by use of which it is possible to show the output
signals and listen to the outcome after each process step of
the pre-process.

25   The analysis of speech signals shown in Figs. 14 and 15 has
been made by means of this software programme running on a
Compaq Deskpro 4/66i PC. This type of PC is provided with
Microsoft Windows Sound System, a microphone and a codec chip
(AD1848) from Analog Devices. The codec chip performs the

30   sampling, the anti aliasing filtration and the A/D
conversion.

The speech signals shown in Figs. 14a and 15a are recorded by
means of this Sound System. The speech signal is sampled with

11025 kHz and 16 bits linear PCM. The passband is greater
than 4.9 kHz.

Pretransient signals are shown in Figs. 14b and 15b. These
signals are the speech signals filtered by a third order IIR
5   digital highpass filter with a cutoff frequency at 3.0 kHz.
The filter is a bilinear transformation of a third-order
Butterworth filter.

The cutoff frequency at 3.0 kHz has been chosen to get the
bandpass in the range of the most sensitive area of the
10   cochlea. In this case it means from 3.0 kHz to 4.9 kHz, where
4.9 kHz is given by the codec chip. The high- or bandpass
filter will be optimal if it has maximum flat delay
characteristic in accordance with equation (10).

The transient signals shown in Figs. 14c and 15c are the
15   pretransient signal rectified and filtered by a second order
IIR digital lowpass filter with a cutoff frequency at about
700 Hz. The filter is a bilinear transformation of a second
order Butterworth filter.

The lowpass filter shall preserve the shape of the transient
20   pulse corresponding to a transient response in the cochlea,
so that a filter which is able to do this will be an optimal
filter. The nerves in the cochlea are able to launch nerve
pulses with a frequency up to about 1.4 kHz. A bandwidth for
the IBP filters in the transient oriented area at 1.4 kHz are
25   transformed by the envelope detection to a cutoff frequency
for a lowpass filter at 700 Hz, which is the reason why a
cutoff frequency at about 700 Hz has been chosen.

The transient signal may be regarded as an expression for the
energy change in the signal.

30   All the signals presented in Figs. 14 and 15 are normalized
to a maximum signal level, which means that the largest
absolute signal value is equal to 32766. The abscissas in

Figs. 14 and 15 represent a time interval of 50 ms and the
ordinates in Figs. 14a, 15a and Figs. 14b, 15b represent the
sound pressure of the corresponding speech signal whereas the
ordinates of Figs. 14c, 15c represent the energy of the
5   corresponding transient speech signal.

It is possible to listen to the speech, the pretransient and
the transient signals, corresponding to Figs. 14a, 15a, 14b,
15b and 14c, 15c, respectively. One of the main demands for
selecting the filter characteristics is that the signals have
10   to maintain a sound which is close to the original speech
signal when listening to the above mentioned signals.

Referring to the system illustrated in Fig. 7, Fig. 14 shows
curves of the vowel "i" as in "heat", when pronounced by a
man, where (a) shows the speech signal before filtration
15   corresponding to the digitalized input signal S(t) in Fig. 7,
(b) shows the signal after a highpass filtration
corresponding to the output signal of the bandpass filter 10
in Fig. 7, and (c) shows the signal after rectifying and
lowpass filtering corresponding to the output signal of the
20   lowpass filter 12 in Fig. 7.

Fig. 15 shows similar curves as in Fig. 14 for the vowel "o"
as in "hop",

The rise and fall time and the width or duration of the
transient pulse is observed to be of importance for the sound
25   in a vowel. Figs. 16-18 give examples of measured transient
pulses. The time window of the vowel "i" as in "heat", when
pronounced by a man, shown in Fig. 16a corresponds to the
processed signal shown in Fig. 14c. The corresponding time
window when the vowel "i" as in "heat" is pronounced by a
30   child is shown in Fig. 16b. From Figs. 16a and 16b it can be
observed that the leading and lagging edges of the most
dominant pulses are sharp with a rise and fall time in about
0.4 ms or less and that the width of the dominant pulses is
about 0.8 ms when measured at the level of about 50 %.

The time window of the vowel "o" as in "hop", when pronounced
by a man, shown in Fig. 17a corresponds to the processed
signal shown in Fig. 15c. The corresponding time window when
the vowel "o" as in "hop" is pronounced by a child is shown

5   in Fig. 17b. From Figs. 17a and 17b it can be observed that
the leading and lagging edges of the most dominant pulses are
sharp with a rise and fall time in about 0.5 ms but the width
of the dominant pulses is about 1.5 ms when measured at the
level about 50 %. The ditch in the dominant pulses of Fig.

10 17b is not deep enough to influence the perception. It should
be noted that the vowel "o" as in "hop" is a sharp vowel, and
a more soft vowel will have a more slow lagging edge.

Fig. 18 shows the time window for the processed signal of the
vowel "a" as in "have" when pronounced by a man. It is to be

15 observed that the shape of the transient pulse has softer
leading and lagging edges than the pulses shown in Figs.
16-17.

Thus, from the above results it may be concluded that the
perception of a vowel is given by the shape of the transient

20 pulse. It is further to be concluded that by analysing the
transient components or pulses which have been extracted from
the auditory signal by way of the above mentioned method of
signal processing, the vowels or phonemes of the speech
signal may be recognised by identifying the shape of the

25 transient pulse or pulses.

In a vowel or phoneme the transient pulse is repeated and the
repetition frequency gives the perception of the pitch. In
Fig. 16a the time period between two succeeding pulses is
about 6 ms corresponding to a man's pitch at 170 Hz and in

30 Fig. 16b the time period between two succeeding pulses is
about 3.5 ms corresponding to a child's pitch at 280 Hz

Thus, it is also to be concluded that by analysing the
transient component or pulses which have been extracted from
the auditory signal by way of the above mentioned method of

signal processing, the pitch of the speech signal may be
determined by determining the time period between the
transient pulses.

Thus, when analysing auditory signals according to a
5   preferred embodiment of the present invention, it is taken
into account that the identity of the sound signal is
preserved during the signal processing which includes a
highpass filtration followed by a rectification and a lowpass
filtration of the input signal.

10   From the above discussion it should be understood that the
present invention provides a method which is very suitable
for use in speech recognition.

Fig. 19 shows a block diagram for a speech recognition system
according to the invention. In this system a pre-process unit
15   20 is provided which comprises the bandpass filter 10,
rectifying circuit 11 and lowpass filter 12 of Fig. 7. Thus,
the pre-process unit, which most conveniently may be
integrated within a single integrated circuit or chip, is a
transient detecting unit in accordance with the method of the
20   present invention. The system further comprises units which
are normally used in speech recognition systems, such as a
pattern recognition unit 21 connected to a reference library
22, a unit for phoneme determination 23 and a unit for
word/sentence determination 24. The system shown in Fig. 19
25   uses template matching but alternative approaches may be used
in a recognition system.

The reference library 22 of Fig. 19 should store a library
corresponding to the shapes which can be generated by the
pre-process unit 20.

30   It should be understood that a single chip pre-process unit
also may comprise the lowpass filter 14 and or the A/D
converter 15 as shown in Fig. 8.

It is to be understood that a pre-process according to the
present invention could be used in many other electronic
systems where speech or sound analysis, recognition, coding
and/or decoding is required, such as quality measurement of
5   audio products or systems, such as loudspeakers, hearing
aids, and telecommunication systems, or for quality
measurement of acoustic conditions. The pre-process may also
be used in connection with speech compression and
decompression in narrow band telecommunication.

10   As illustrated in Fig. 10 the preferred cutoff frequency of
the lowpass filter 12 used in a pre-process unit should be
below 1 kHz. Thus, all the necessary signal information of
the auditory signals is represented within a rather narrow
frequency range of 1 kHz. This should be compared to the
15   frequency band of around 9000 bits per second which is used
within the GSM mobile telecommunication system for the
communication of speech signals. By using the pre-process
method or unit of the present invention it should be possible
to decrease the frequency band used for telecommunication
20   down to about 1000 bits per second which would result in
great savings within this area of communication.

Thus, it should be understood that the present method is very
well suited for optimizing the bandwidth within narrow band
telecommunicaton and it is within the scope of the invention
25   that when transmitting an auditory signal in a
telecommunication system, the signal should be processed by
using the pre-process described herein before being
transmitted and received by a receiver. It it preferred that
prior to transmission of the processed signal, the signal is
30   coded into a digital representation, and the coded signal is
decoded in the receiver so as to reestablish transient pulse
shapes perceived by the animal ear such as the human ear as
representing the distinct sound pictures of the auditory
signal.

During the above mentioned digital transmission the bandwidth
may be chosen so as to fulfil different requirements to the
quality of the received, decoded and reestablished transient
pulse. Thus, a bandwidth of at the most 4000 bits per second
5 may be selected, but it should be possible to obtain a good
quality of the reestablished pulse by using a bandwidth
around 2000 bits per second. However, it is preferred that
the bandwith is in the interval of 800-2000 bits per second.
It is to be noted that for telecommunicating systems where a
10 high system performance is preferred as opposed to a high
quality of the reestablished signal, such as for example in
military systems, a bandwidth about 400 bits per second may
be selected.

When transmitting the digital signals it is preferred that
15 the digital information comprises information about leading
edge, lagging edge, and duration of the transient pulse
representing the processed auditory signal. It is also
preferred that a second and further pulses in a sequence of
identical pulses are represented by a digital sign indicating
20 repetition when transmitted.

It is also an object of the present invention to provide a
method to be used in speech synthesis.

From the discussion of the experimental results of Figs.
14-18 it should be understood that the sound of each vowel or
25 phoneme might be given by the shape of a dominating transient
pulse corresponding specifically to that phoneme. From
experiments it has been concluded that transient pulses
similar to the processed pulses of Figs. 16-18 hold the
necessary information in order to generate the sound of the
30 phoneme.

By use of the software developed for the transient analysis
illustrated in Figs. 14-18 it is possible to create a simple
transient signal by placing points in a system of coordinates
where the ordinate is the amplitude and the abscissa is the

time in ms. One transient pulse may be created by placing one
or several points and interpolate a line between the points
either by a straight line or a sine curve and define a
period. The signal is repeated for 300 ms and it is possible
5   to listen to the signal when converted by a D/A converter in
the codec chip.

It should be noted that the pulse rise time or the form of
the leading edge, the duration of the pulse, and the fall
time or the form of the lagging edge are all important
10   features for identification, representation and/or generation
of transient pulses for use in speech recognition and/or
synthesis. These features may also be used in connection with
speech compression.

This is illustrated in Figs. 20-25 which show how transient
15   pulses used for speech synthesis or identification should be
formed for the phonemes "i" as in "heat", "o" as in "hop",
"o" as in "ongaonga" or as in the Danish word "Ole", "u" as
in the word "who", "ø" as in the Danish word "øse", and "y"
as in the Danish word "lys", respectively. The pulses are
20   repeated within a period of 5 ms.

From Fig. 20 it can be seen that the phoneme "i" as in "heat"
could be formed by a very short pulse having a duration in
the range of 0.3-1.1 ms, with a rise time of the leading edge
being in the range of 0.3-0.5 ms. The fall time of the
25   lagging edge should also be in the range of 0.3-0.5 ms.

Similarly it is observed from Fig. 21 that the phoneme "o" as
in "hop" could be formed by a pulse having a duration in the
range of 1.3-1.8 ms, with a rise time of the leading edge
being in the range of 0.3-0.5 ms. The fall time of the
30   lagging edge should be in the range of 0.3-0.5 ms.

From Fig. 22 it is observed that the phoneme "o" as in the
Danish word "Ole" could be formed by a pulse having a
duration in the range of 1.3-1.8 ms in the upper part of the

pulse, with a rise time of the leading edge being in the
range of 0.3-0.5 ms. The fall time of the lagging edge for
this phoneme may vary, but should be in the range of 1.0-2.0
ms.

5   From Fig. 23 it is observed that the phoneme "u" as in the
word "who" could be formed by generating a transient pulse
with a sine curve interpolation and a duration in the range
of 1.0-2.0 ms. The preferred duration should be about 1.5 ms.

Fig. 24 show the pulse of the phoneme "ø" as in the Danish
10   word "øse". Here the leading edge may have a rise time in the
range of 0.4-0.6 ms. The fall time of the lagging edge should
be in the range 1.0-2.0 ms.

Fig. 25 show the pulse of the phoneme "y" as in the Danish
word "lys". Here the leading edge may have a rise time in the
15   range of 1.0-2.0 ms. The fall time of the lagging edge should
also be in the range 1.0-2.0 ms.

When synthesizing human speech in accordance with the above
mentioned principles of the invention it is preferred to
generate a series of transient pulses corresponding to the
20   series of phonemes which constitutes the speech to be
synthesized. It is furthermore preferred that the series of
phonemes is established from a series of letters using rule-
based conversion.

It should be understood that the principles of the invention
25   also can be used for quality measurement of audio products.
In such a measurement a well defined transient signal should
be transmitted to the audio product, and the distorsion of
the response can be measured. The distorsion may be measured
by using a pre-process in accordance with the principles
30   illustrated in Fig. 7.

The principles of the invention may also be used in hearing
aids in order to improve noise suppresion in speech signals.

A library of features representing characteristic shapes of
the transient pulses may be used for identifying the speech
signal and separate the speech signal from the noise
background.

5   The experiments presented have, for the first time, shown
some common features for phonemes which are very simple to
recognize and generate, but which could be of great
significance within the whole area of recognition and
generation of speech or auditory signals.

10 The performance of the method and system of the present
invention is described in the time domaine. It is however to
be understood that the transient signals, components and/or
pulses being described in the time domaine also could be
given a corresponding description in the frequency domaine,
15 which would naturally be within the scope of the invention.

It is also to be noted that the methods of signal processing
described above could be performed either digitally,
electronically by use of analog components, mechanically, or
by any combination thereof. Such methods of processing would
20 also be within the scope of the invention.

CLAIMS

1. The use of the shape of energy changes of an auditory
signal for identifying or representing features which can be
perceived by an animal ear such as a human ear as
5   representing a distinct sound picture.

2. The use according to claim 1, wherein the shape of the
energy changes of the auditory signal is represented by the
shape of a transient pulse of the signal.

3. The use according to claim 2, wherein the shape of a
10   transient pulse is obtained by use of an envelope detection.

4. The use according to any of the preceding claims, wherein
the distinct sound picture is a phoneme.

5. A method for identifying, in an auditory signal, energy
changes which can be perceived by an animal ear such as a
15   human ear as representing a distinct sound picture, the
method comprising comparing the shape of energy changes of
the signal with predetermined energy change shapes
representing distinct sound pictures.

6. A method according to claim 5, wherein the shape of the
20   energy changes are represented by the shape of a transient
pulse of the signal.

7. A method according to claim 6, wherein the shape of a
transient pulse is obtained by an envelope detection of a
transient response of the energy change in the auditory
25   signal.

8. A method for processing an auditory signal to reduce the
bandwith of the signal with substantial retention of the
information of the signal, comprising extracting the
30   transient component of the auditory signal and detecting an
envelope of the transient component.

33

9. A method according to claim 8, wherein transient pulse shapes of the signal which can be perceived by an animal ear such as a human ear as representing a distinct sound picture are identified.

5   10. A method according to claim 9, wherein the distinct sound picture is a phoneme.

11. A method according to claim 6 or 9, wherein the shape of the leading edge of a pulse is identified.

12. A method according to claim 11, wherein the shape of the
10   leading edge is determined by determining rise time, slope and/or slope variation of at least part of the leading edge.

13. A method according to claim 12, wherein the rise time, slope and/or slope variation of at least the top part of the leading edge is determined.

15   14. A method according to claim 13, wherein the top part is the part beginning substantially at a point where the slope is maximum.

15. A method according to claim 12, wherein the rise time, slope and/or slope variation of the leading edge is
20   determined on the basis of at least 5 samples.

16. A method according to any of claims 11-15, wherein the identification of the shape of the leading edge is performed using comparison with a library of references.

17. A method according to claim 16, wherein the references
25   with which comparison is made are selected on the basis of the rise time of the leading edge.

18. A method according to claim 6 or 9, wherein the duration of a pulse is identified.

19. A method according to claim 18, wherein the duration of a pulse is determined as the distance from the leading edge to the lagging edge at a predetermined amplitude.

20. A method according to claim 19, wherein the predetermined amplitude is an amplitude of at the most 50% of the maximum amplitude of the pulse.

21. A method according to any of claims 11-20 wherein pulses which cannot be perceived by the animal ear are discarded from the identification.

22. A method according to claim 21, wherein a pulse the leading edge of which has an amplitude of less than 50% of the amplitude of the amplitude of the preceding pulse and an onset time of less than 3.5 ms is disregarded.

23. A method according to any of claims 11-22, wherein the shape of the lagging edge of a pulse is identified.

24. A method according to claim 23, wherein the shape of the lagging edge is determined by determining fall time, slope and/or slope variation of at least part of the leading edge.

25. A method according to any of claims 11-23, wherein the time period between leading edges of pulses which can be perceived by the animal ear is determined.

26. A method according to claim 25, wherein the time period between leading edges which have a distance of at least 3 ms from each other is determined.

27. A method for telecommunicating an auditory signal, comprising processing the signal by the method according to any of claims 8-26, transmitting the processed signal, and receiving the processed signal by a receiver.

28. A method according to claim 27, wherein, prior to transmission of the processed signal, the signal is coded into a digital representation, and the coded signal is decoded in the receiver so as to reestablish transient pulse
5 shapes perceived by the animal ear such as the human ear as representing the distinct sound pictures of the auditory signal.

29. A method according to claim 28, wherein the digital transmission is performed at a bandwidth of at the most 4000
10 bits per second.

30. A method according to claim 29, wherein the bandwith is at the most 2000 bits per second.

31. A method according to claim 30, wherein the bandwith is in the interval of 800-2000 bits per second.

15 32. A method according to any of claims 28-31, wherein the digital information comprises information about leading edge, lagging edge, and duration of the transient pulse.

33. A method according to any of claims 28-32, wherein a the second and further pulses in a sequence of identical pulses
20 are represented by a digital sign indicating repetition.

34. A method according to any of the claims 8-26, wherein the extraction of transient component comprises a bandpass filtration or a highpass filtration.

35. A method according to any of the claims 8-26 or 34,
25 wherein the envelope detection comprises a rectification and a lowpass filtration.

36. A method according to claim 34, wherein the lower cutoff frequency of the bandpass or highpass filtration is at least 2 kHz, such as about 3 kHz.

36

37. A method according to claim 34 or 36, wherein the upper
cutoff frequency is in the range between 4.5 and 7 kHz,
preferably about 6 kHz.

38. A method according to claim 35, wherein the
5   rectification is a one-way rectification.

39. A method according to claims 35 or 38, wherein the cutoff
frequency of the lowpass filtration is in the range of 400-
1000 Hz, preferably about 700 Hz.

40. A method according to any of the claims 8-26 or 34,
10   wherein the envelope detection comprises bandpass filtration
by use of a bank of filters.

41. A method of identifying or representing the phoneme "i"
as in "heat", comprising identifying or generating a
transient pulse with a rise time of the leading edge of at
15   the most 0.5 ms and a duration of at the most 1.1 ms.

42. A method according to claim 41, wherein the rise time of
the leading edge is at the most 0.4 ms, preferably at the
most 0.3 ms.

43. A method according to claim 41 or 42, wherein the
20   duration is at the most 1.0 ms, preferably about 0.8 ms.

44. A method of identifying or representing the phoneme "o"
as in "hop", comprising identifying or generating a transient
pulse with a rise time of the leading edge of at the most 0.5
ms and a duration of 1.3-1.8 ms.

25   45. A method according to claim 44, wherein the rise time of
the leading edge is at the most 0.4 ms, preferably at the
most 0.3 ms.

46. A method according to claim 41 or 42, wherein the fall time of the lagging edge is at the most 0.5 ms, preferably at the most 0.4 ms and more preferably at the most 0.3 ms.

47. A method of identifying or representing the phoneme "o"
as in the English word "ongaonga" or the Danish word "Ole", comprising identifying or generating a transient pulse with a rise time of the leading edge of at the most 0.5 ms and a duration of 1.3-1.8 ms.

48. A method or identifying or representing the phoneme "u"
as in the English word "who", comprising identifying or generating a transient pulse with a sine curve interpolation and a duration of at 1.0-2.0 ms, preferably about 1.5 ms.

49. A method according to any of the claims 1-26 or 41-48, when used in speech recognition.

50. A method according to any of the claims 1-7 or 41-48, used in speech compression.

51. A method according to any of the claims 1-7 or 41-48, when used for synthesizing human speech, comprising generating a series of transient pulses corresponding to the series of phonemes which constitutes the speech to be synthesized.

52. A method according to claim 51, wherein the series of phonemes is established from a series of letters using rule-based conversion.

53. A method according to any of the claims 1-7 or 41-48, used in quality-measurement of audio products, the audio products preferably being loudspeakers, hearing aids or telecommunication systems.

54. A method according to any of the claims 1-7 or 41-48,
used in quality-measurement of acoustic conditions in a room
or in the open.

55. A system for processing an auditory signal to reduce the
5 bandwith of the signal with substantial retention of the
information of the signal, comprising means for extracting
the transient component of the auditory signal, and
means for detecting an envelope of the transient component.

56. A system according to claim 55, further comprising means
10 for identifying or representing the energy changes on the
basis of the shape of the transient pulses.

57. A system according to claims 55 or 56, wherein the means
for transient component extraction comprises a bandpass
filter or a highpass filter.

15 58. A system according to any of the claims 55-57, wherein
the envelope detection means comprises a rectifier and a
lowpass filter.

59. A system according to claim 57 or 58, wherein the lower
cutoff frequency of the bandpass or highpass filter is at
20 least 2 kHz, such as about 3 kHz.

60. A system according to any of the claims 57-59, wherein
the upper cutoff frequency of the bandpass filter is in the
range between 4.5 and 7 kHz, preferably about 6 kHz.

61. A system according to any of the claims 58-60, wherein
25 the rectifier is a one-way rectifier.

62. A system according to any of claims 58-61, wherein the
cutoff frequency of the lowpass filter is in the range of
400-1000 Hz, preferably about 700 Hz.

63. A system according to claim 55 or 56, wherein the envelope detection means comprises a filter bank.
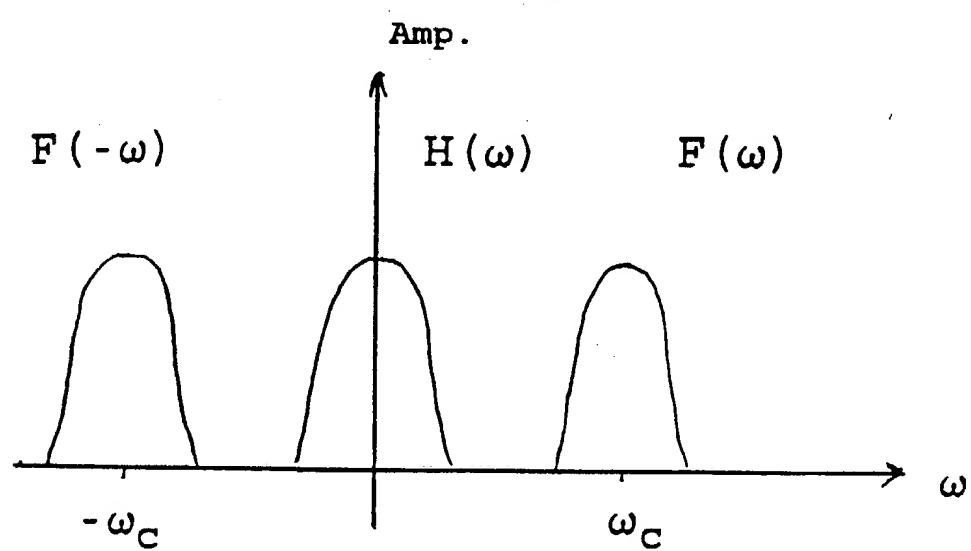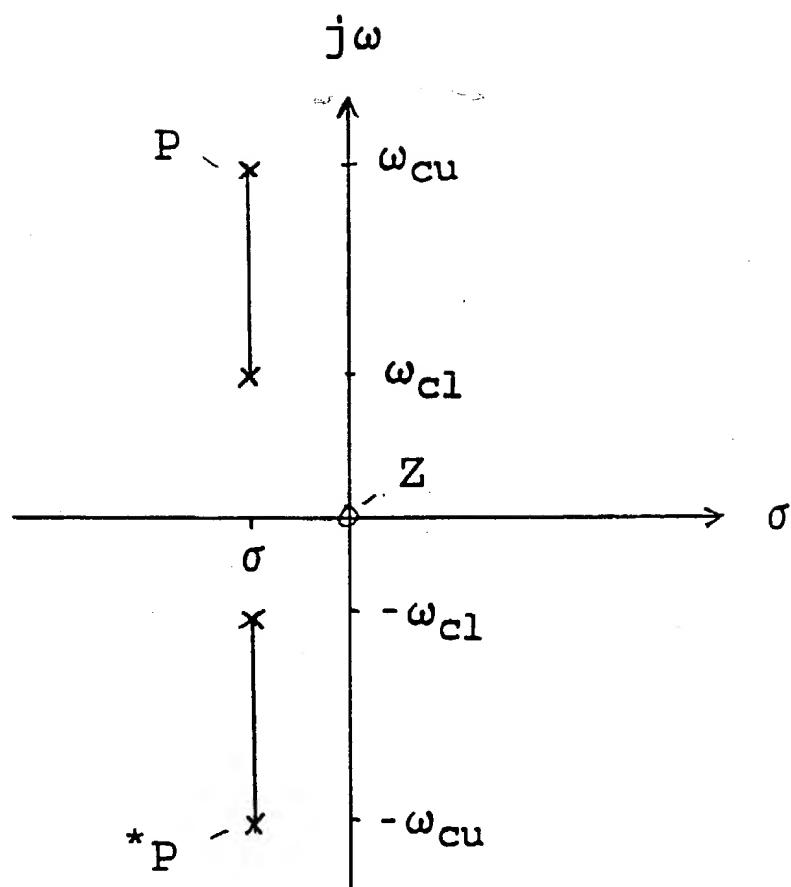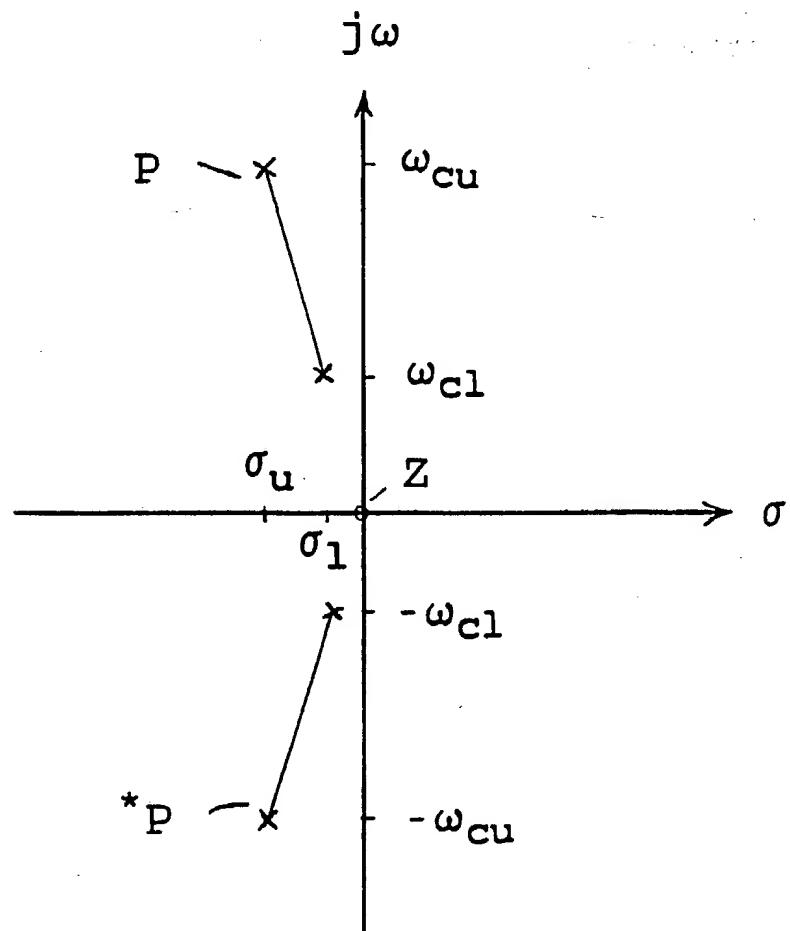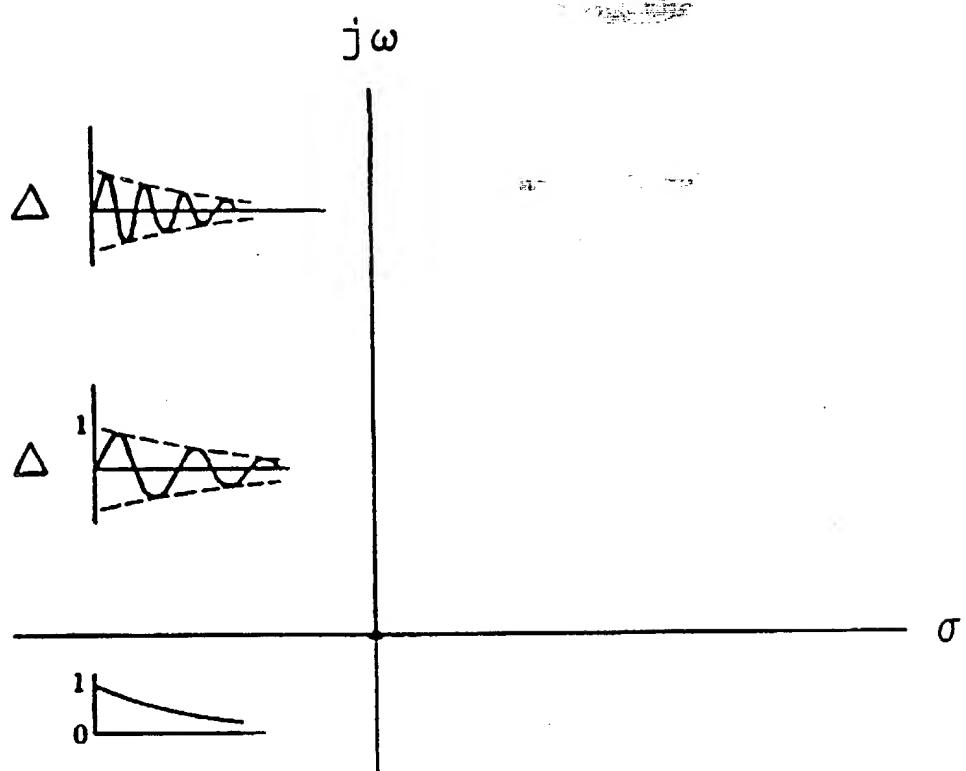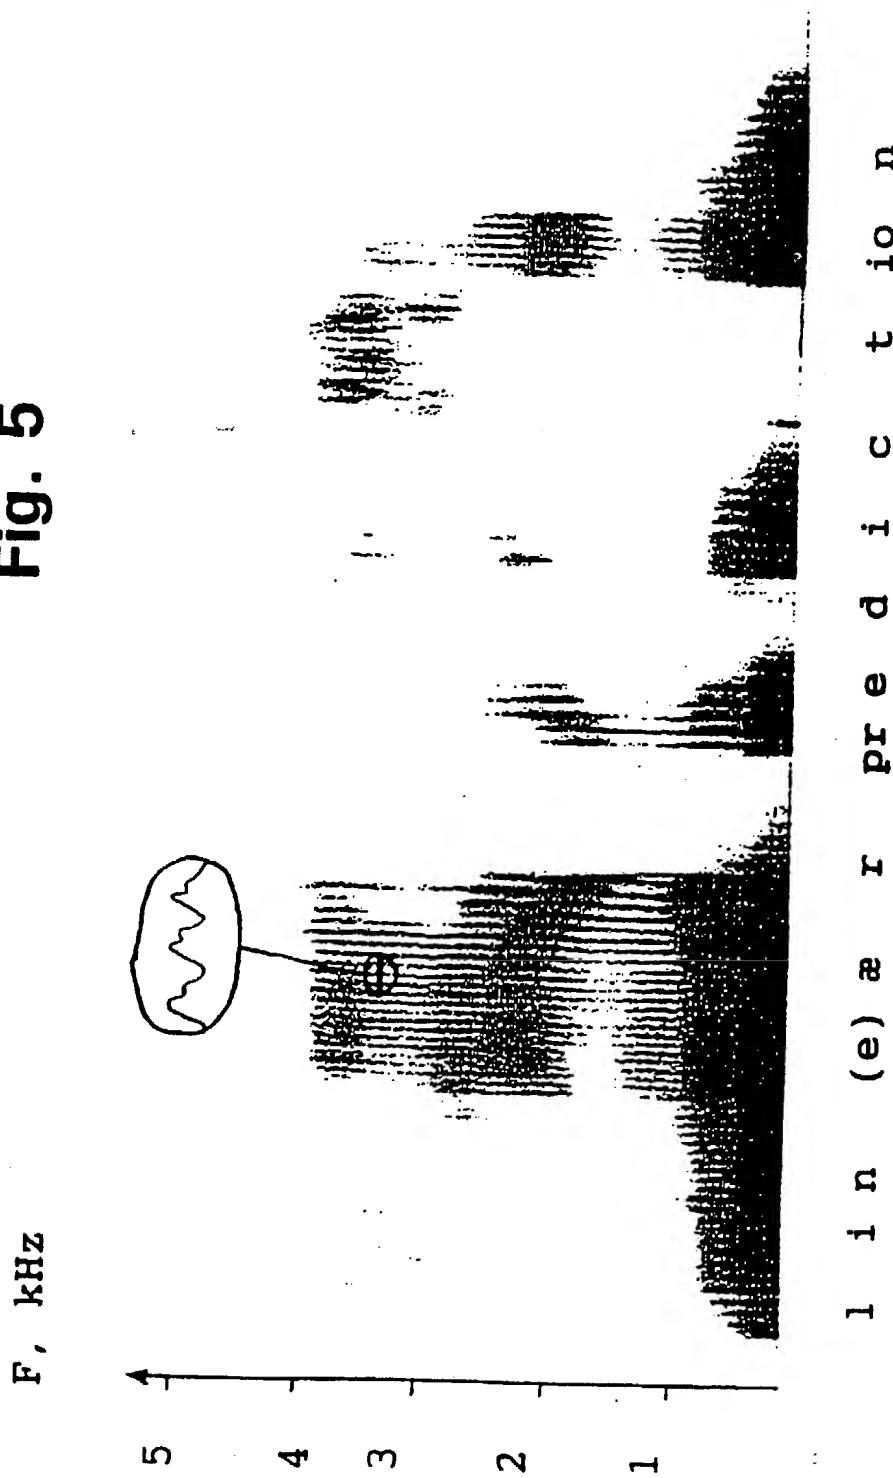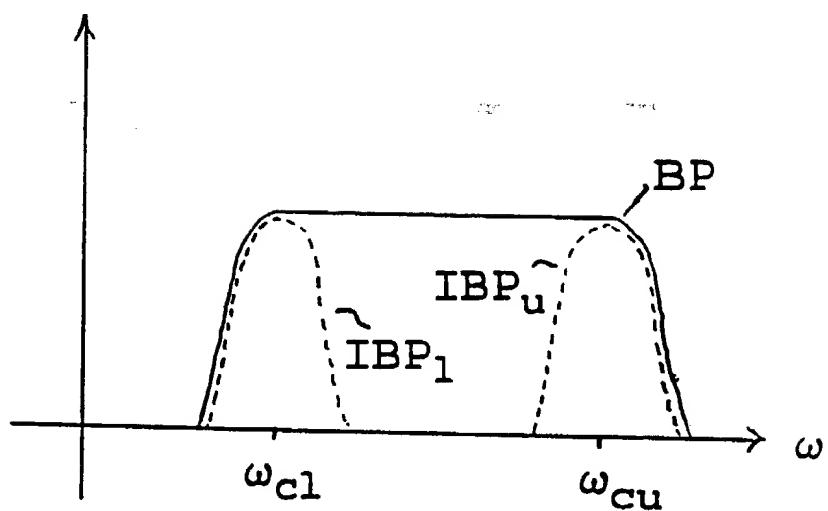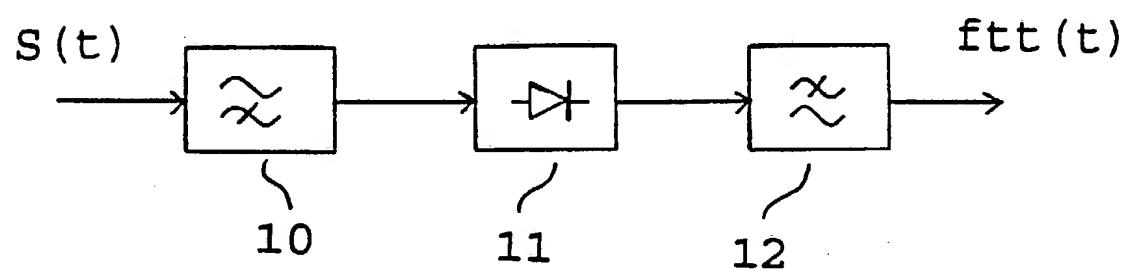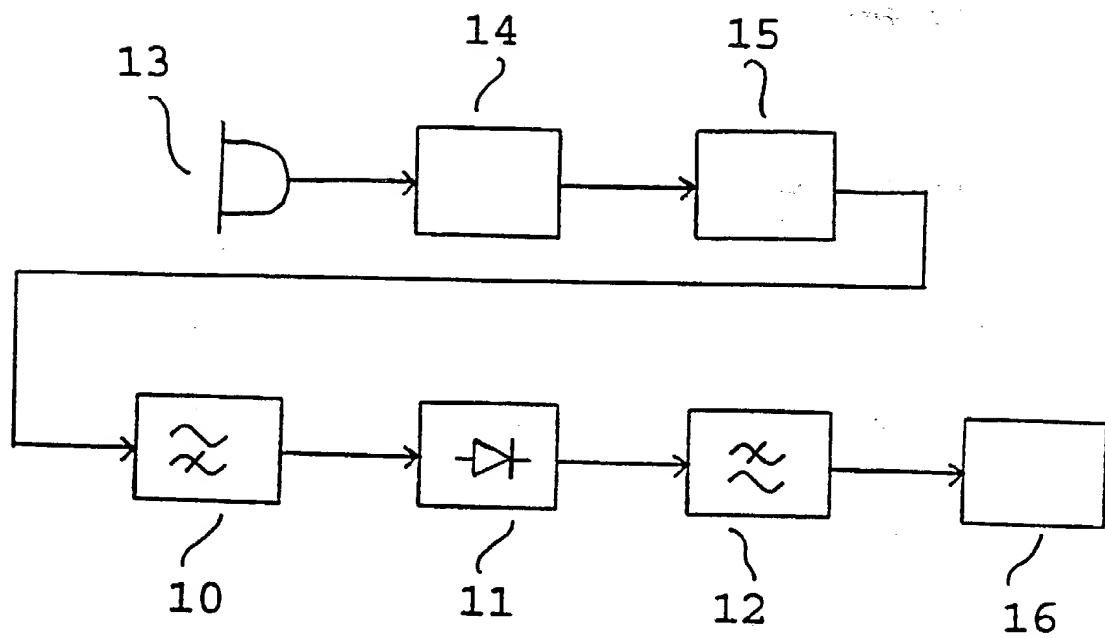
Fig. 1

Fig. 2

Fig. 3

Fig. 4

Fig. 5

Fig. 6

S(t) → [≈] → [▷|] → [≈] → ftt(t)

10   11   12

Fig. 7

Fig. 8

Spectrum   f 3 dB: 3014 Hz

Fig. 9

Spectrum   f 3 dB: 732 Hz

Fig. 10

Fig. 11

Fig. 12

Fig. 13a

Fig. 13b

Fig. 13c

Power spectra, /u(:)/.

_._, man. __, woman. _._, child

Fig. 13d

Fig. 13e

Fig. 13f

Transient signal, /a(:)/,woman.

Time in ms.

Amplitude.
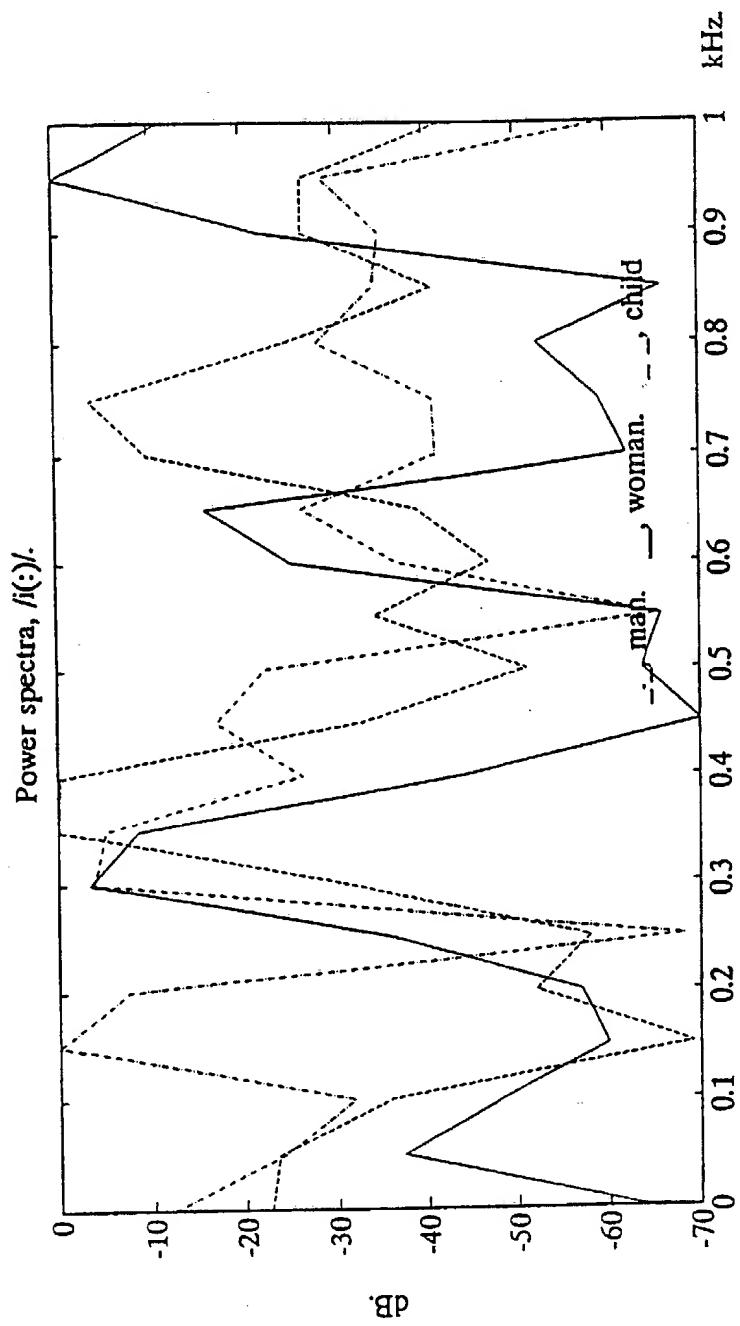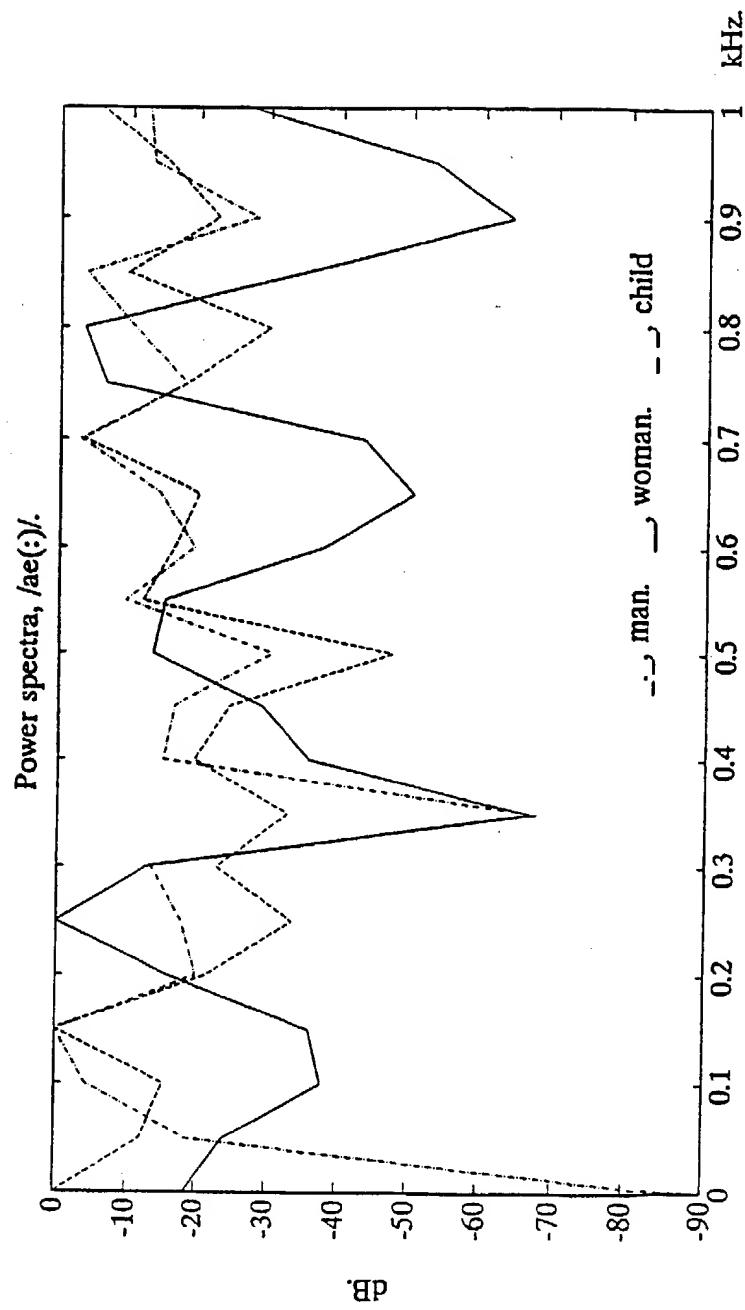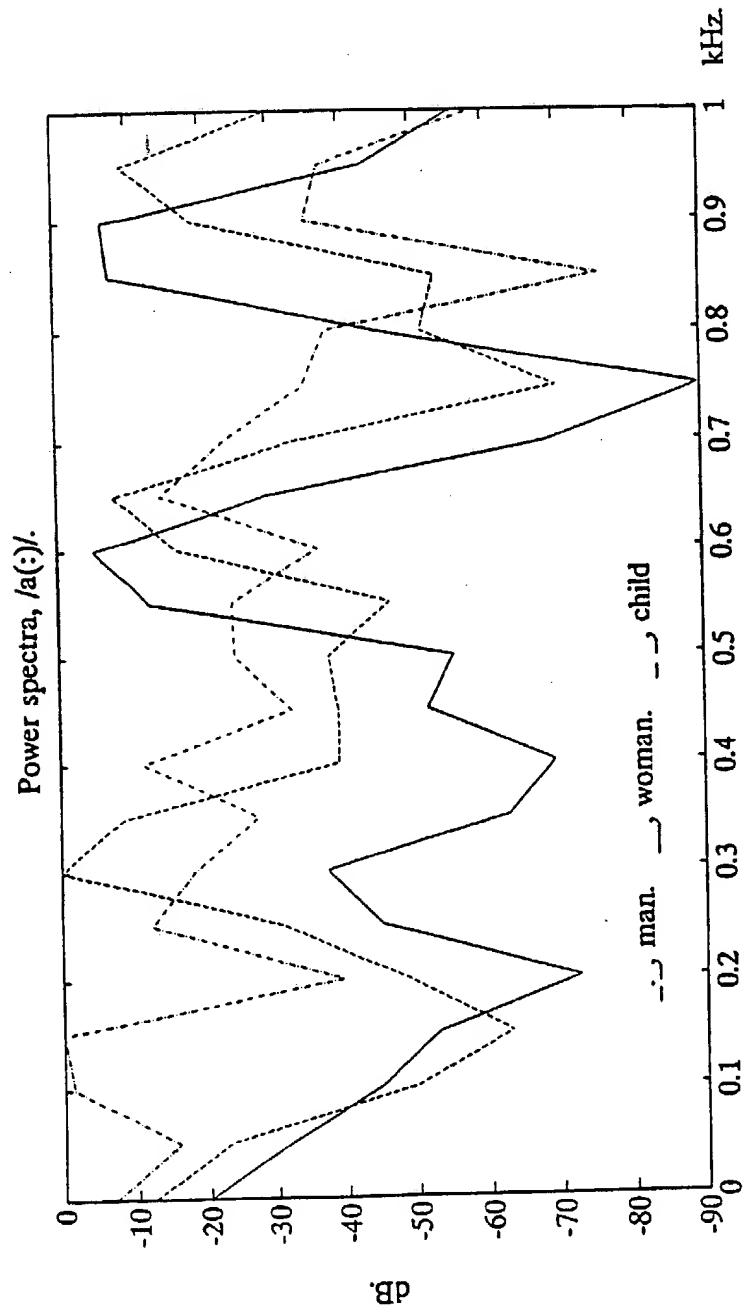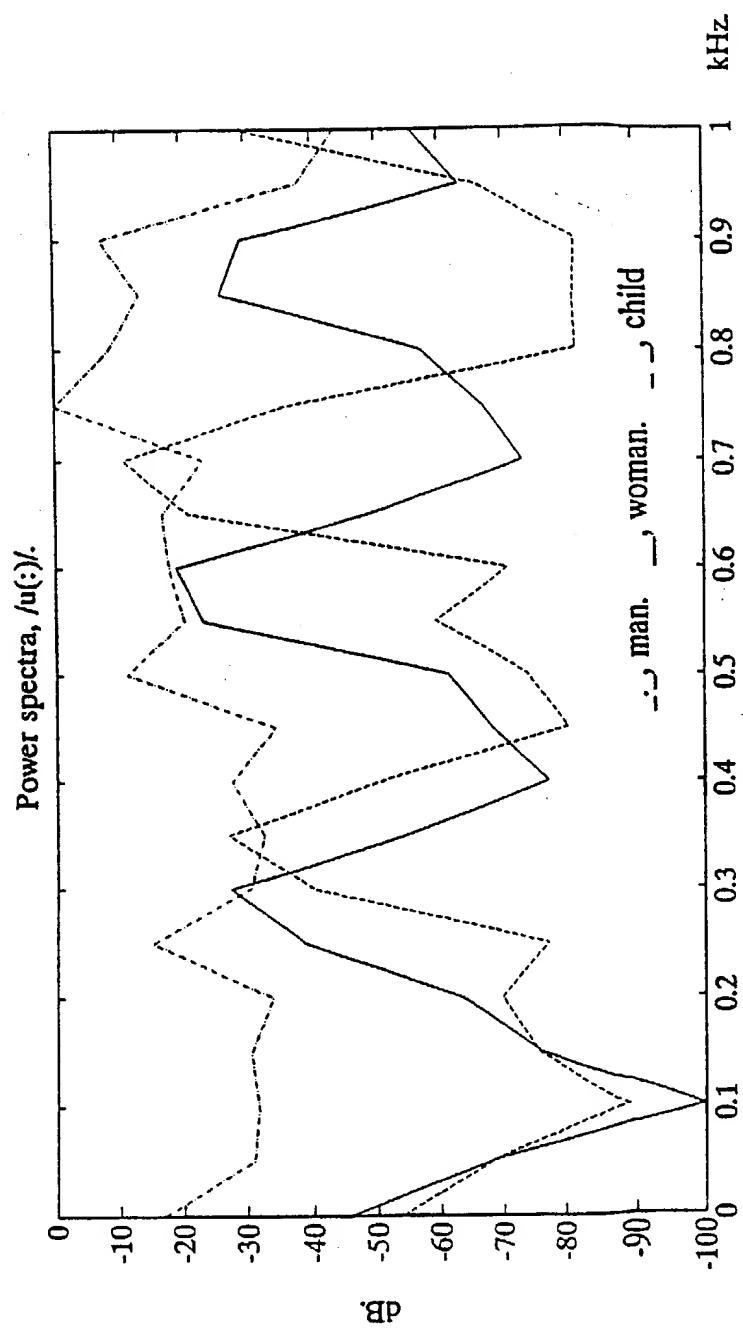
Fig. 13g
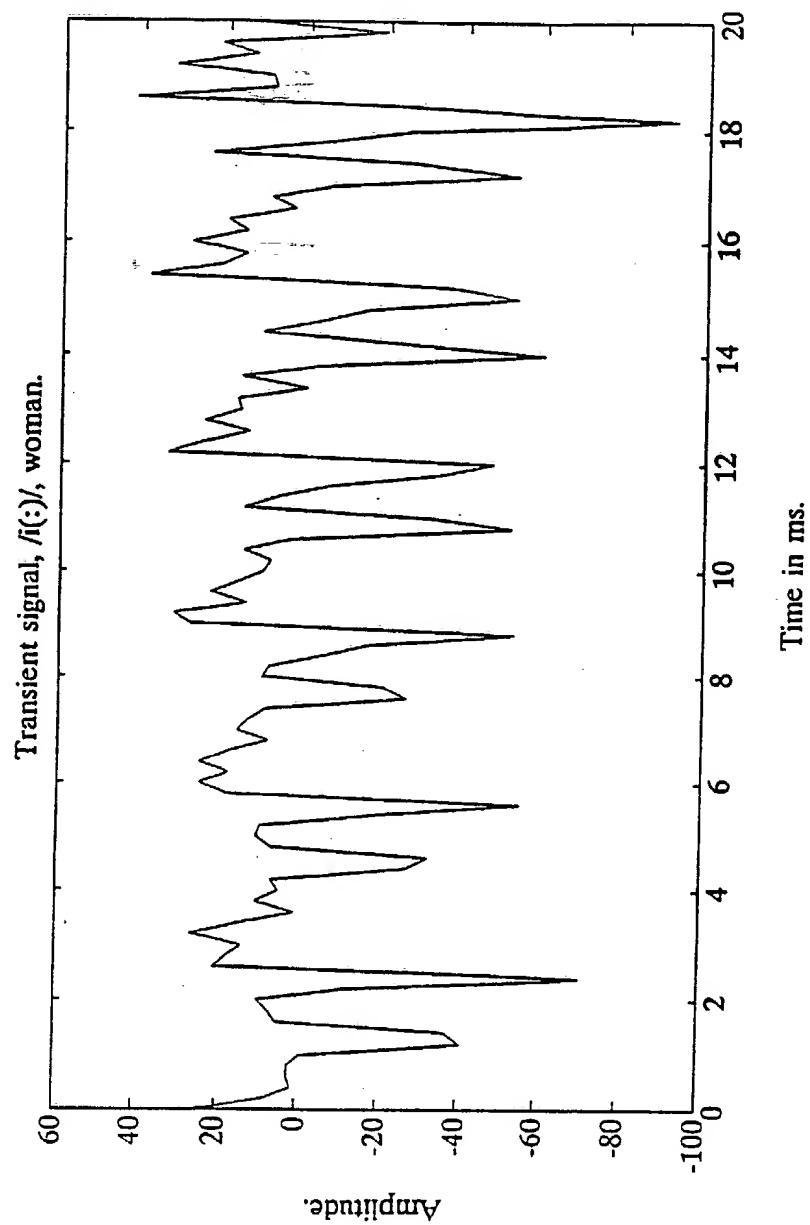
Transient signal, /u(:)/, woman.
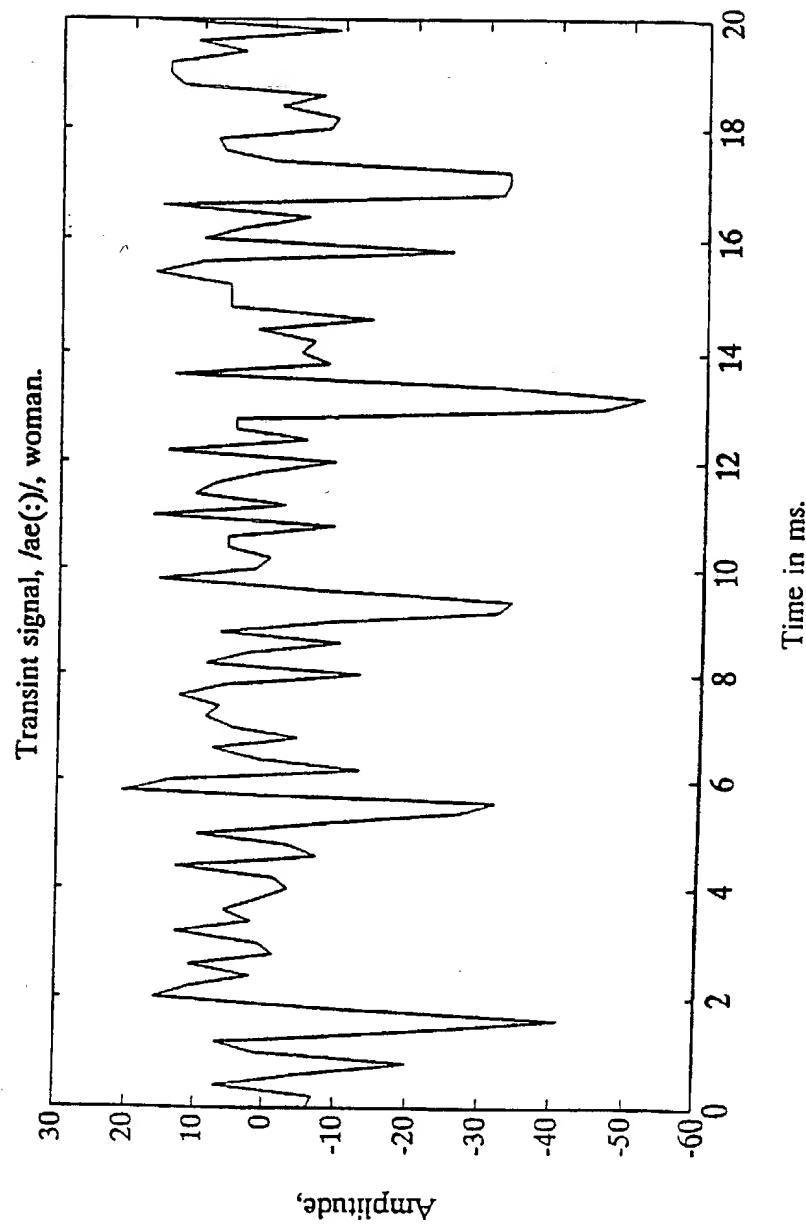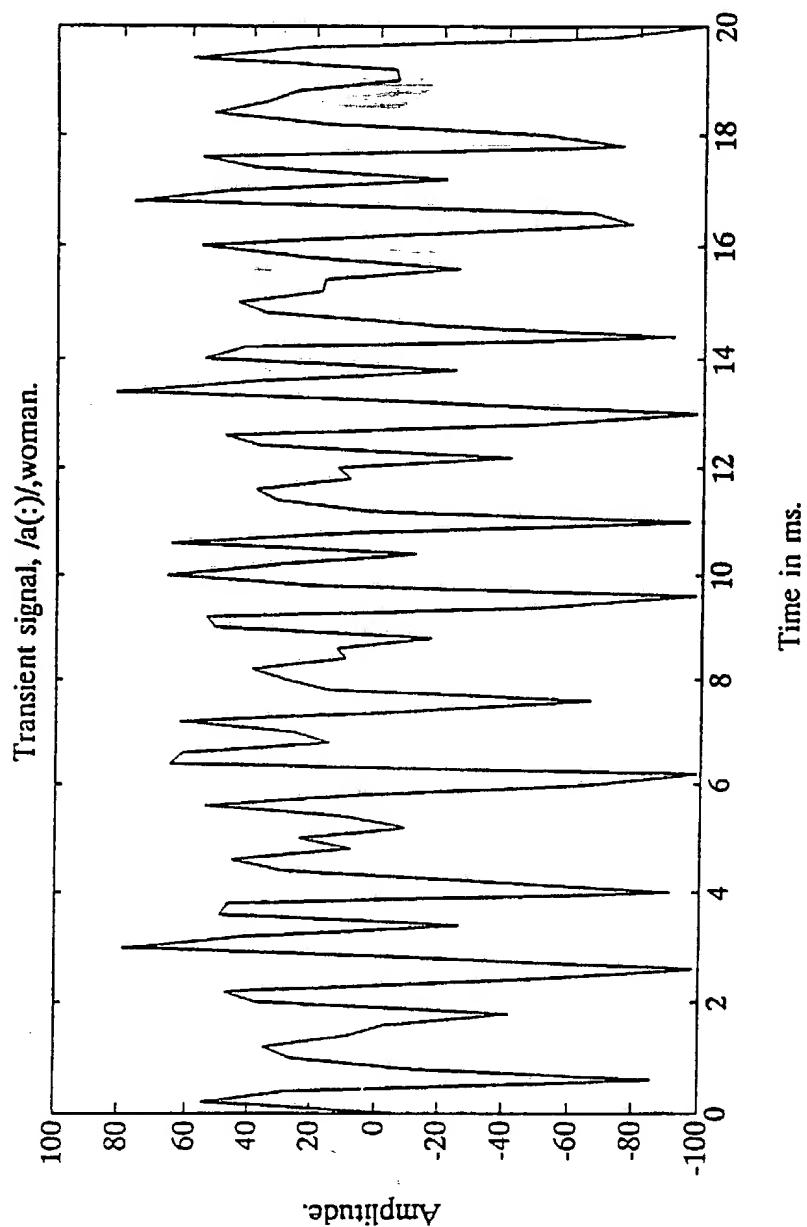
Fig. 13h

Fig. 13i
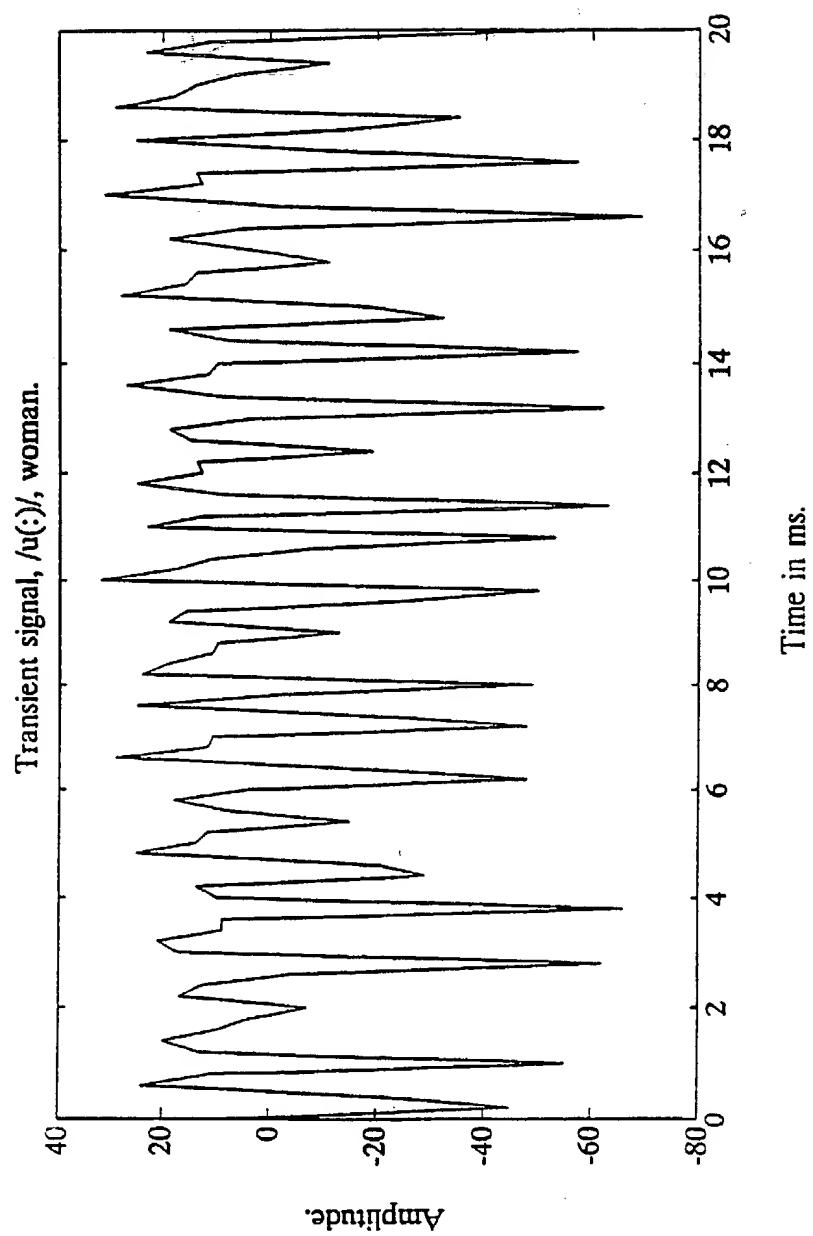
Fig. 13j

Transient signal, /a(:)/, man.
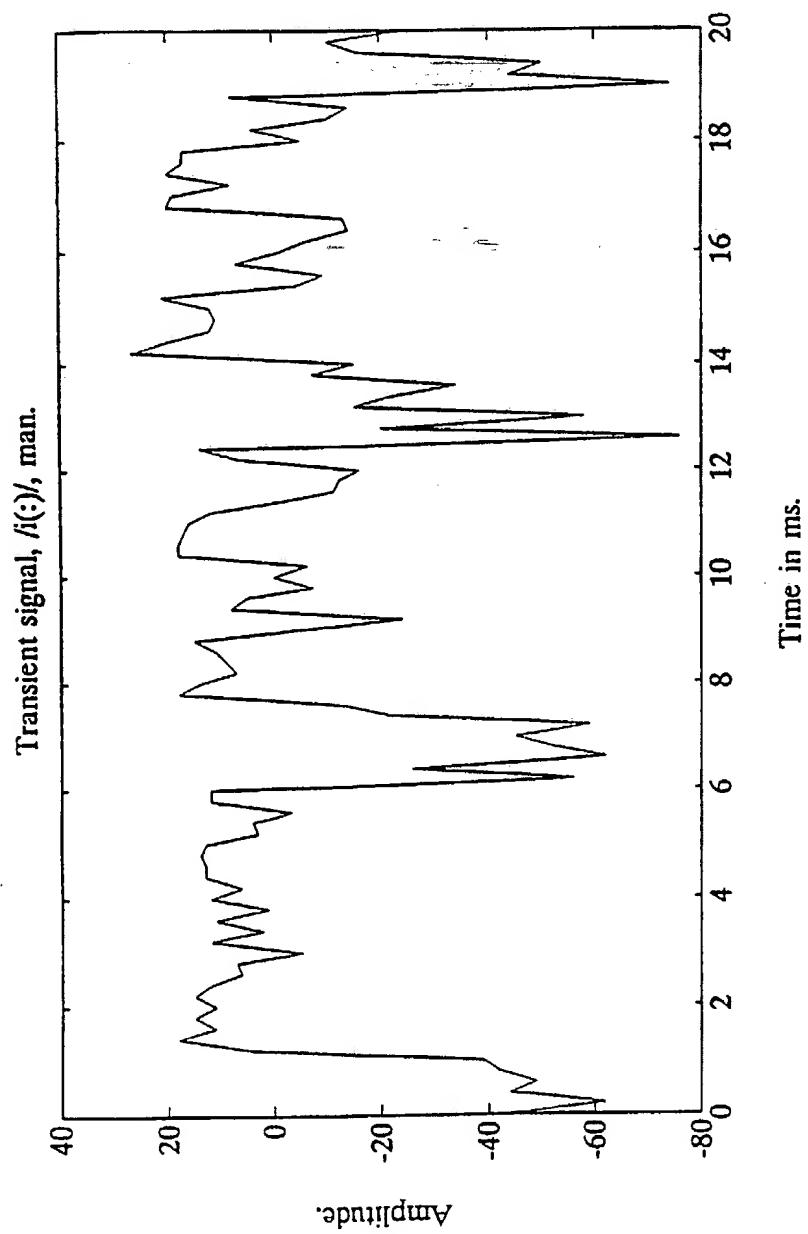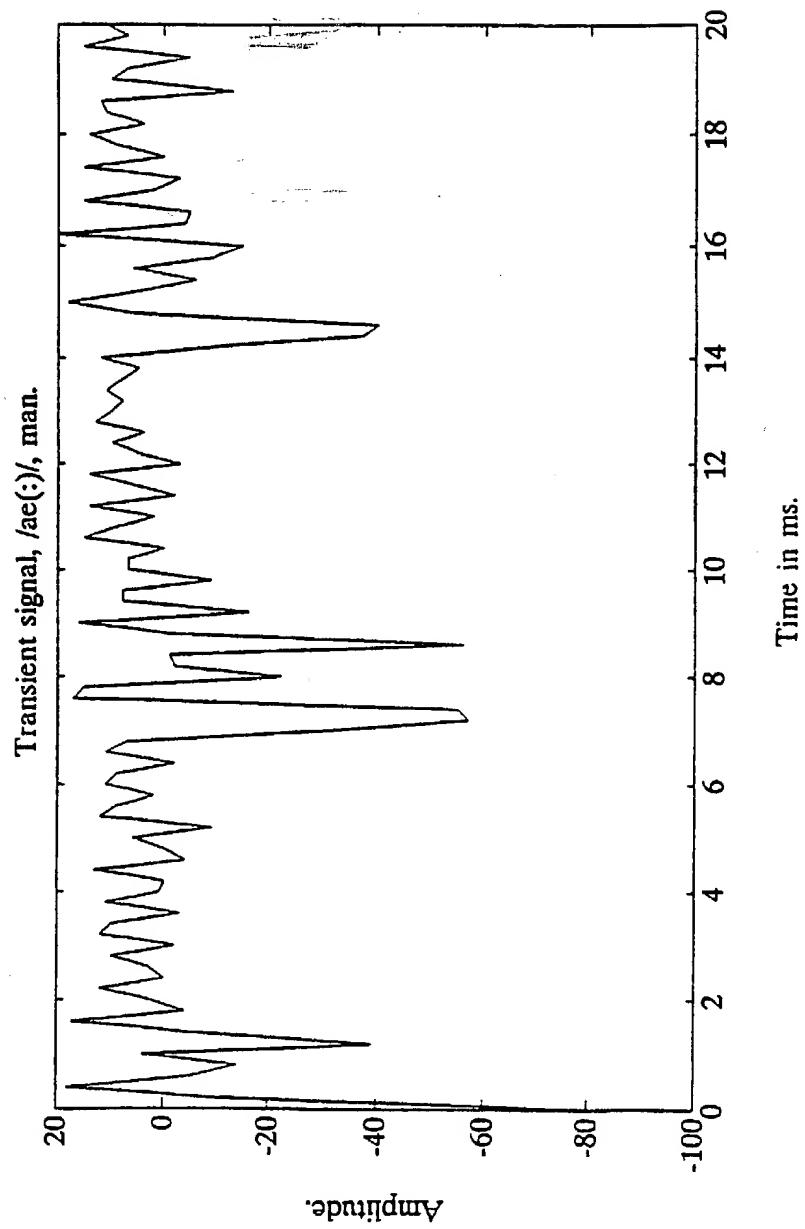
Fig. 13k
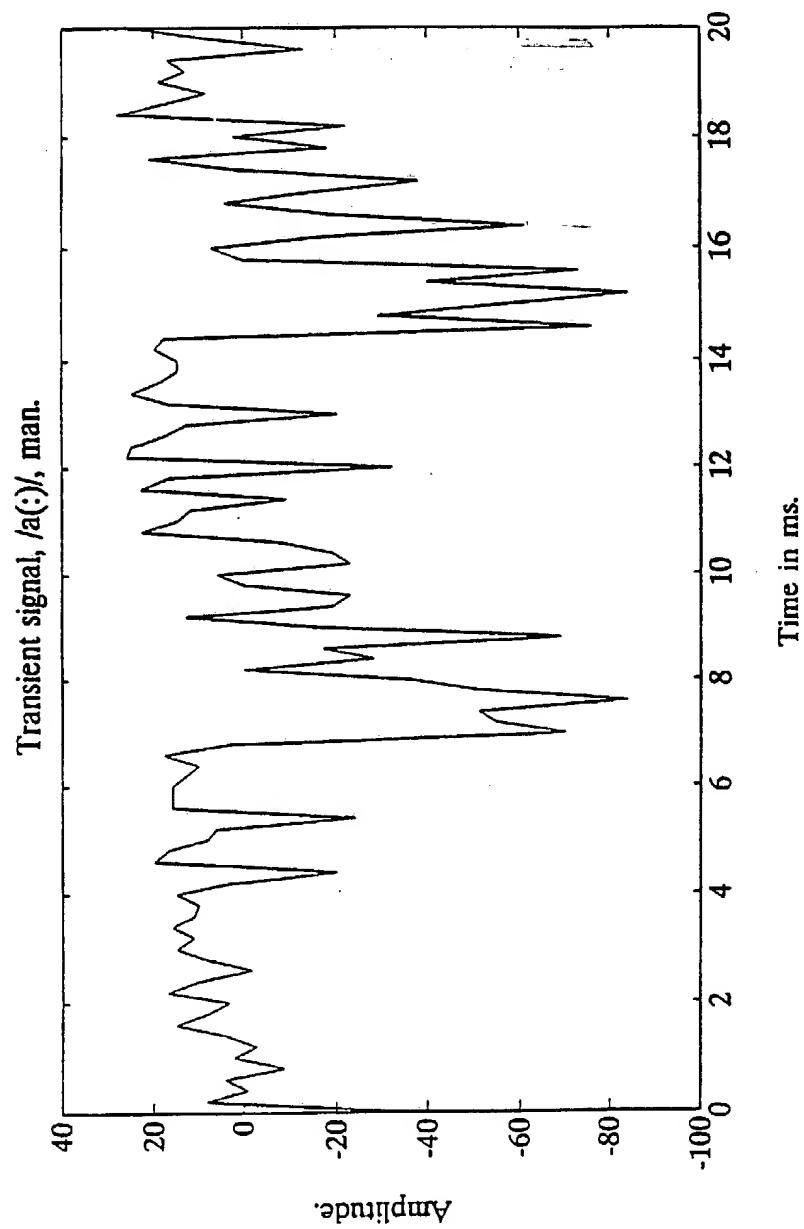
Fig. 13l
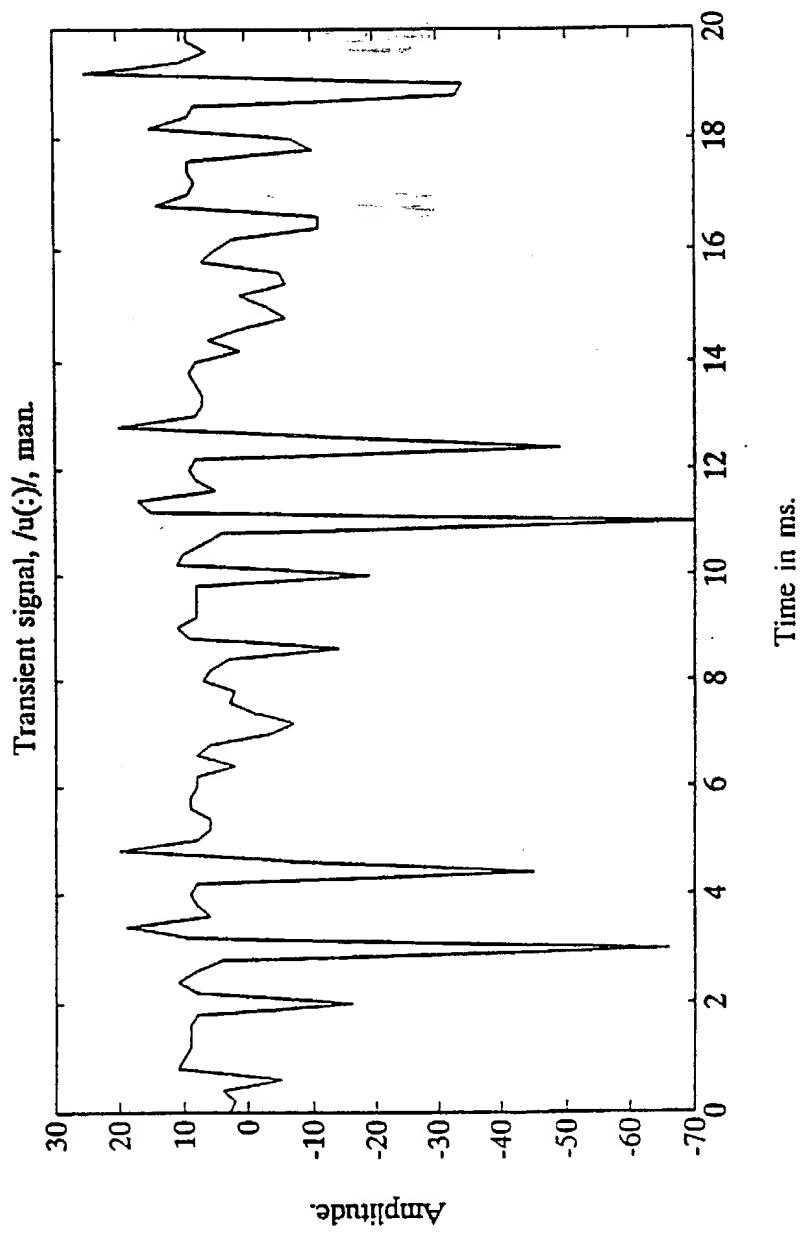
Fig. 13m

Fig. 13n
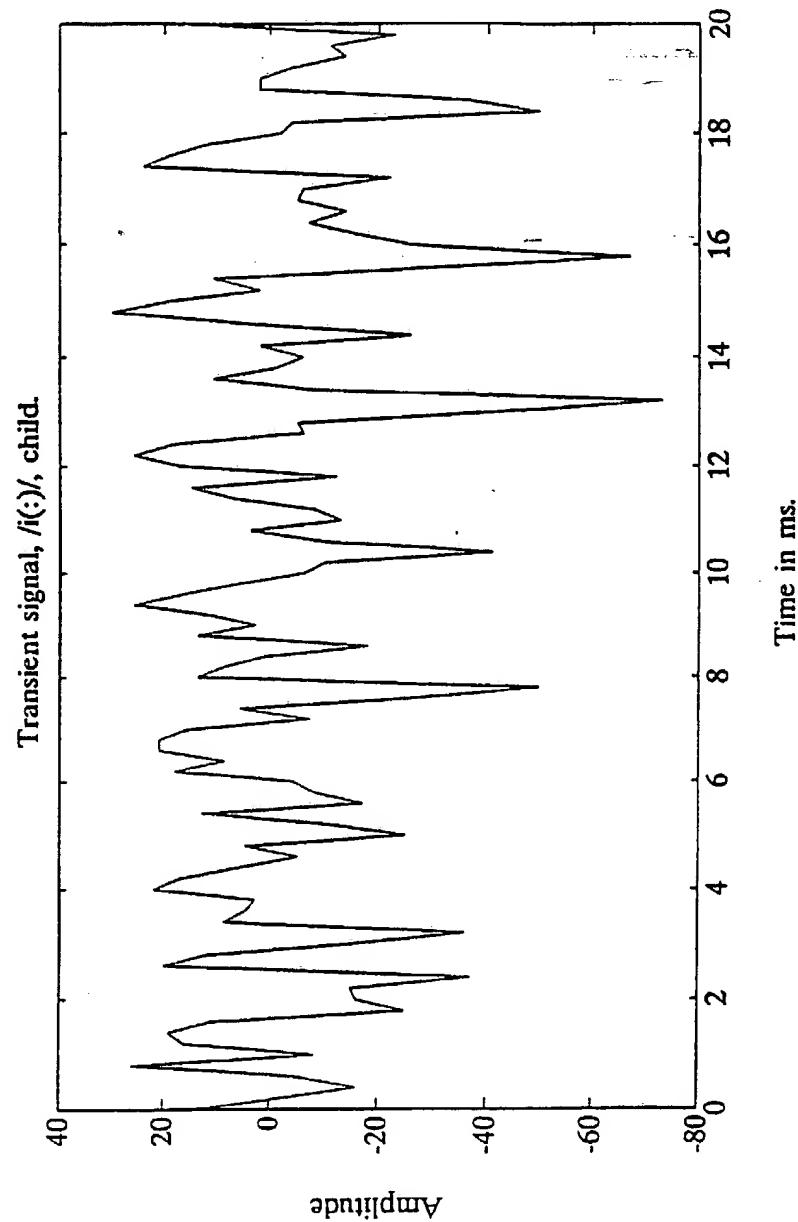
Transient signal, /a(:)/, child.
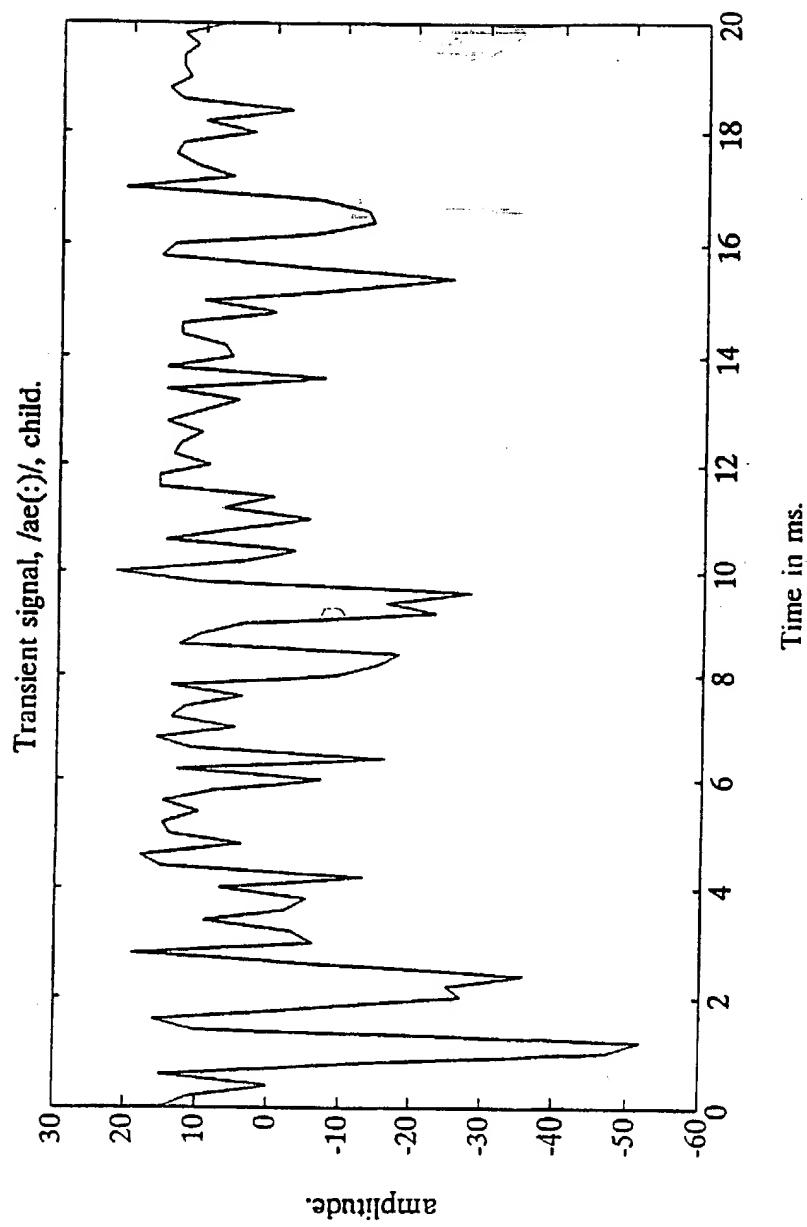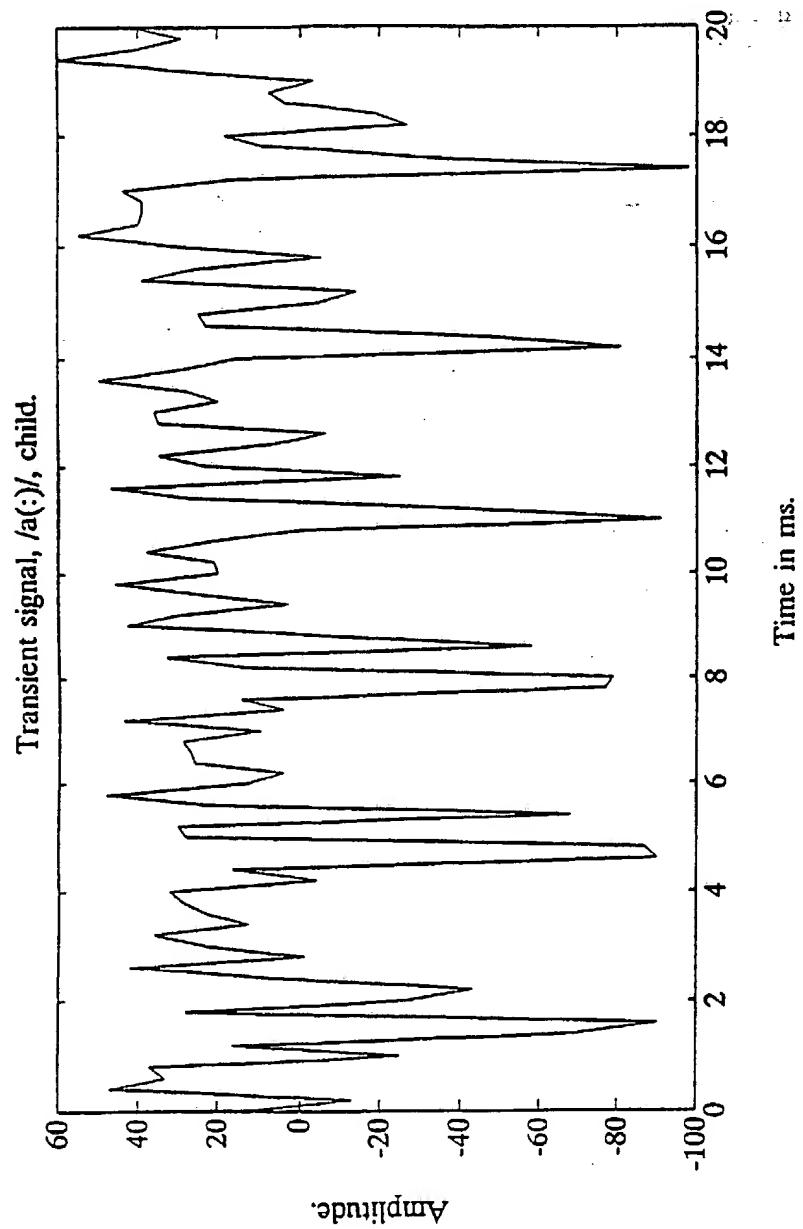
Fig. 13o

Transient signal, /u(:)/, child.
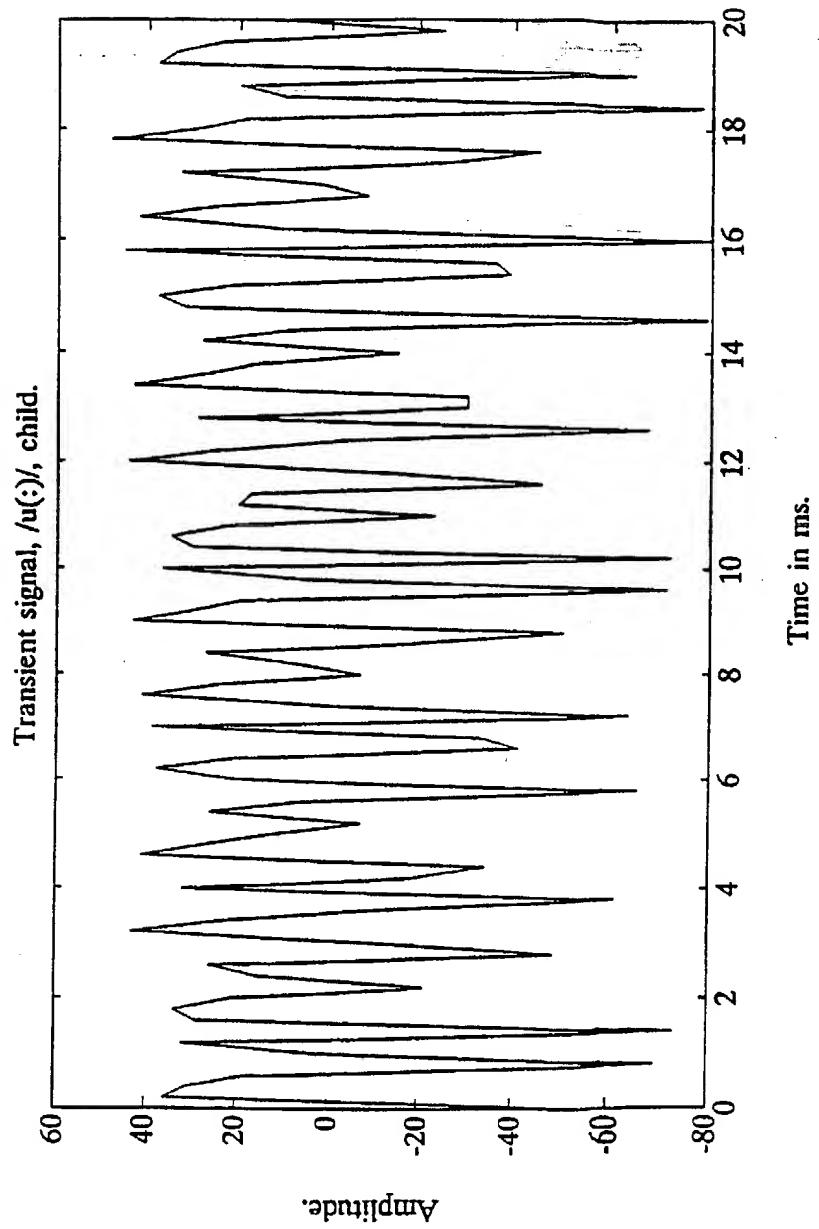
Fig. 13p
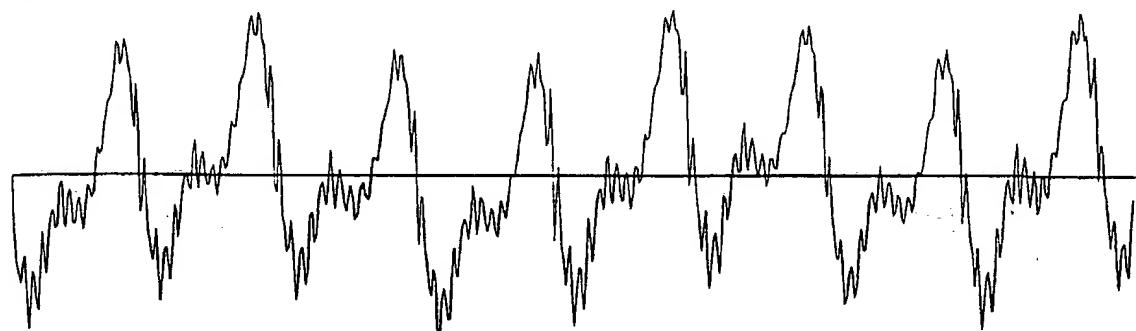
Speech signal.

Fig. 14a

Pretransient signal
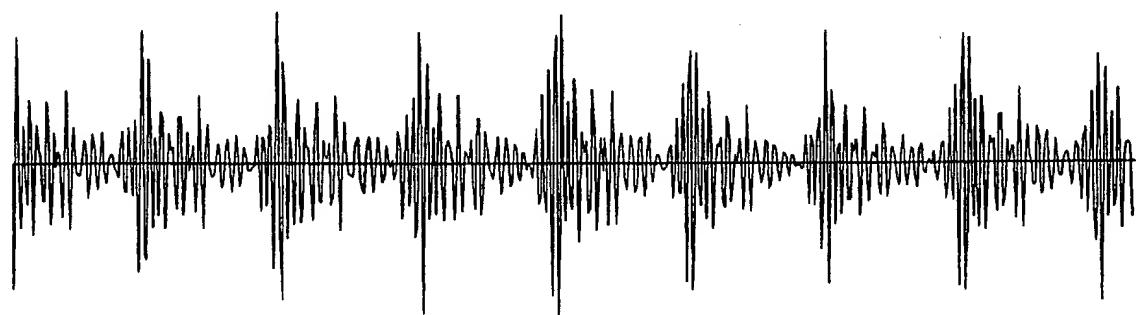
Fig. 14b

Transient signal.
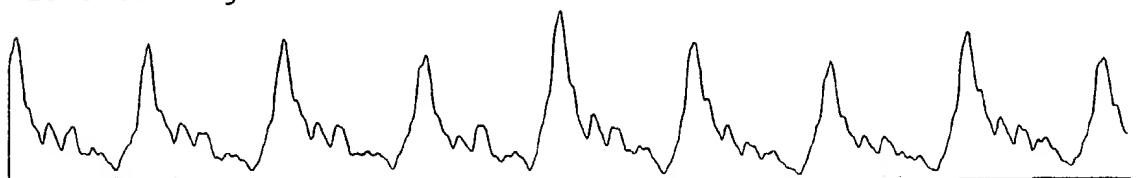
Fig. 14c

Speech signal.
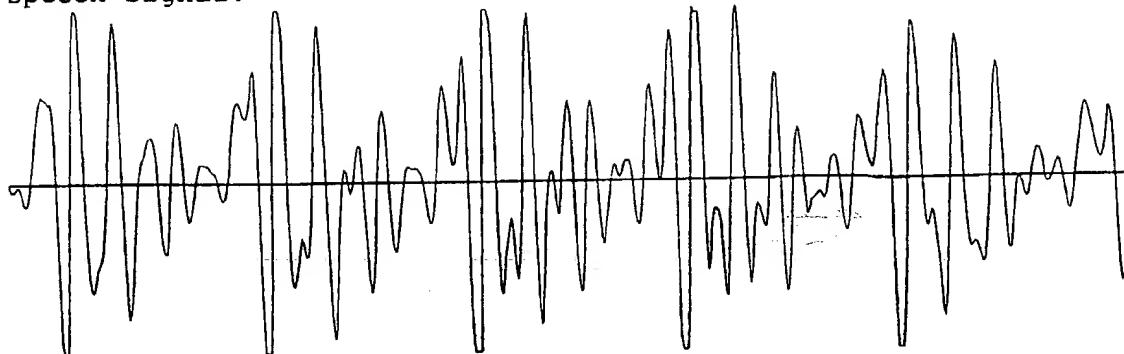
Fig. 15a

Pretransient signal
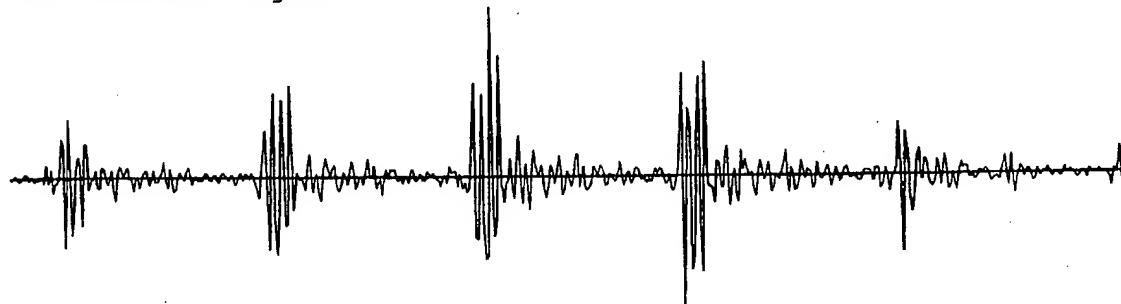
Fig. 15b

Transient signal.
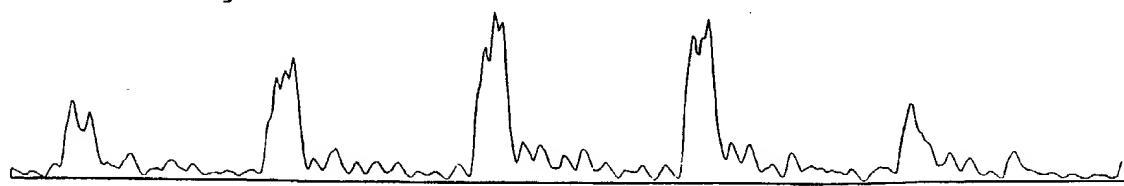
Fig. 15c

TimeWindow. Normalized.
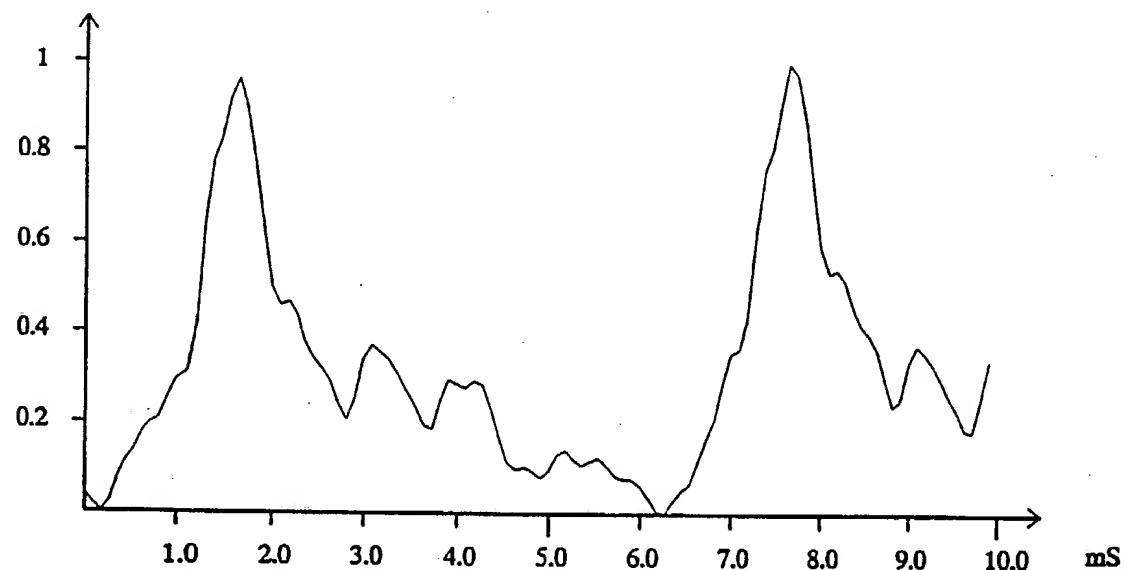
Fig. 16a

TimeWindow. Normalized.
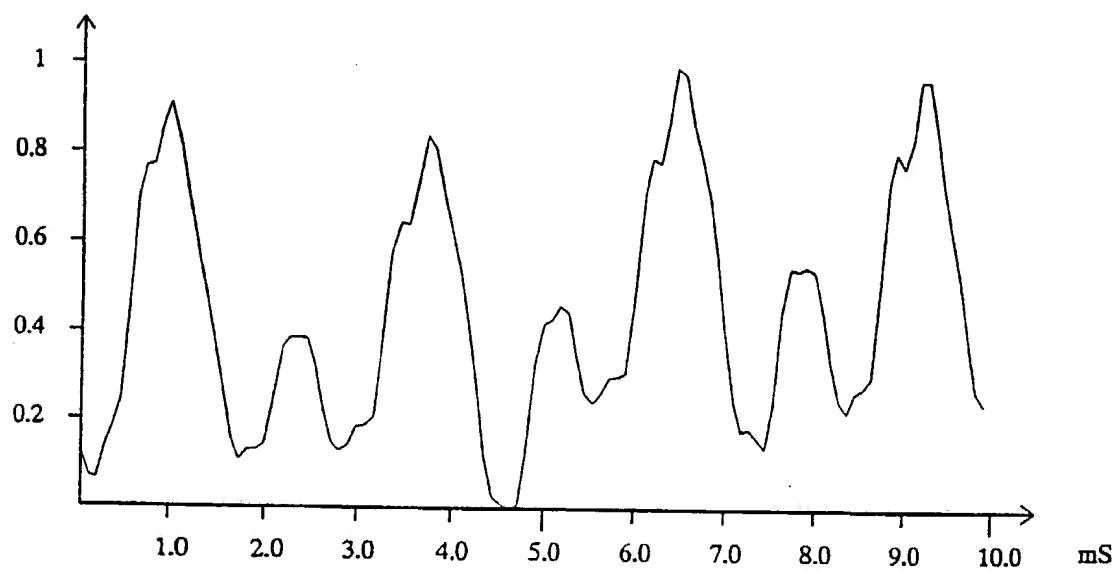
Fig. 16b

TimeWindow. Normalized.
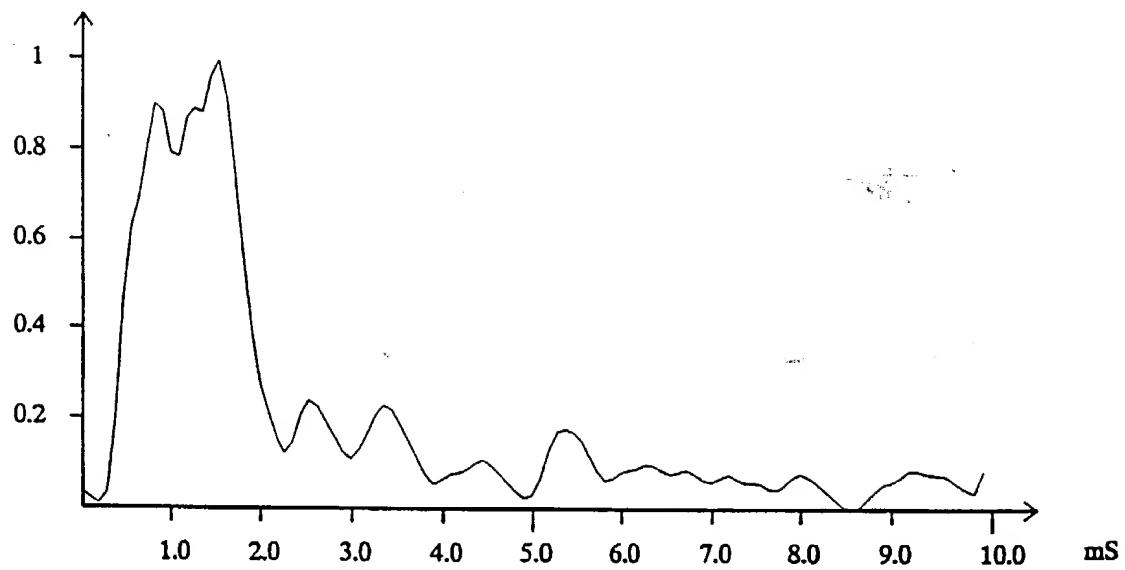
Fig. 17a

TimeWindow. Normalized.
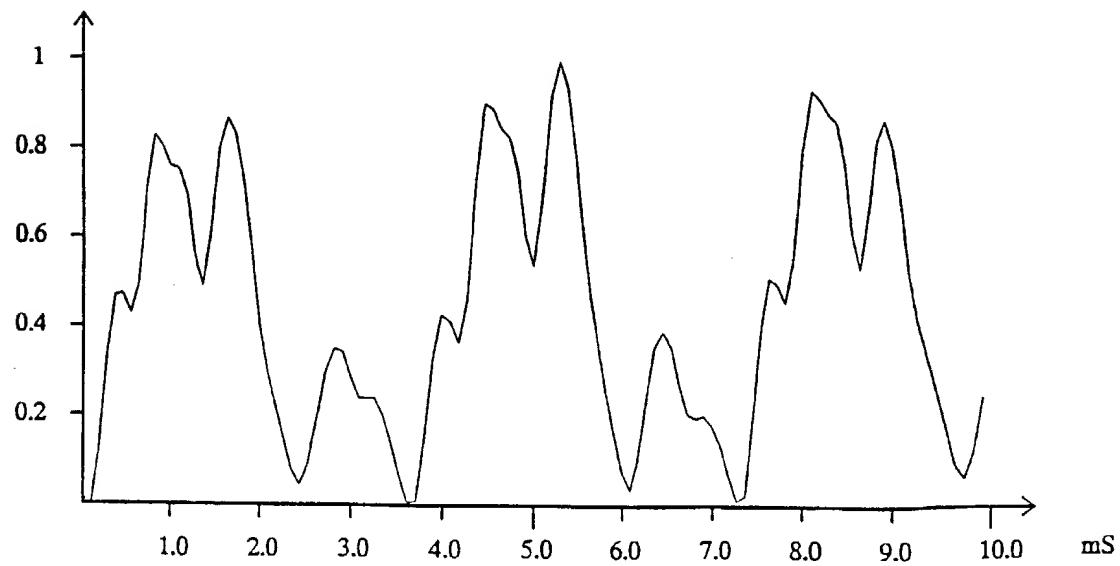
Fig. 17b
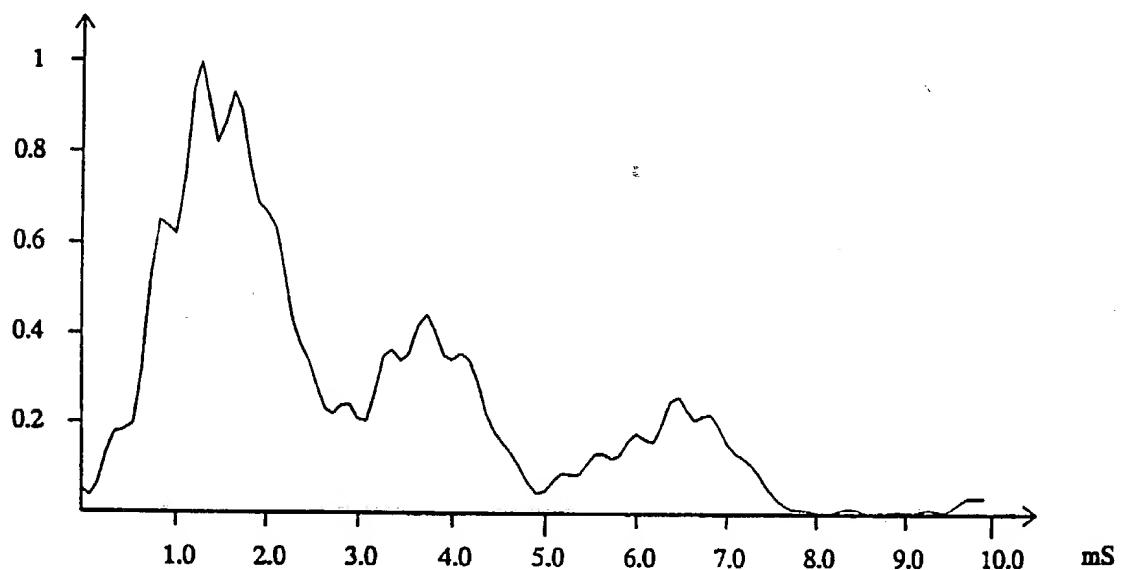
Fig. 18
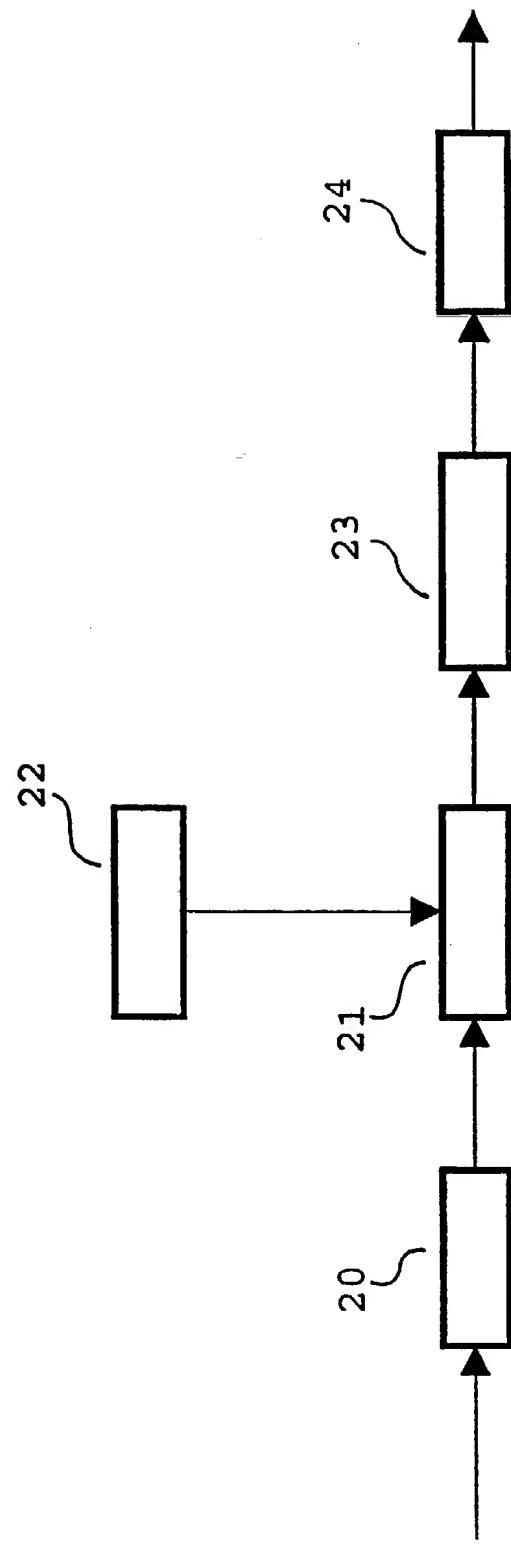
Fig. 19

Percept. Normalized.

Fig. 20

mS
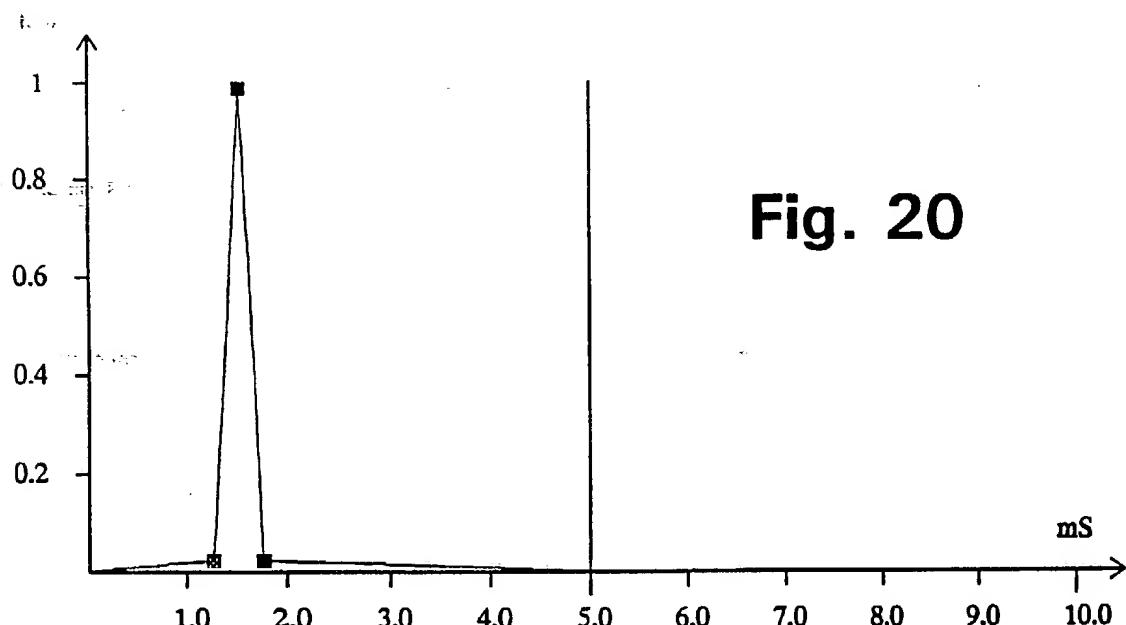
Percept. Normalized.

Fig. 21
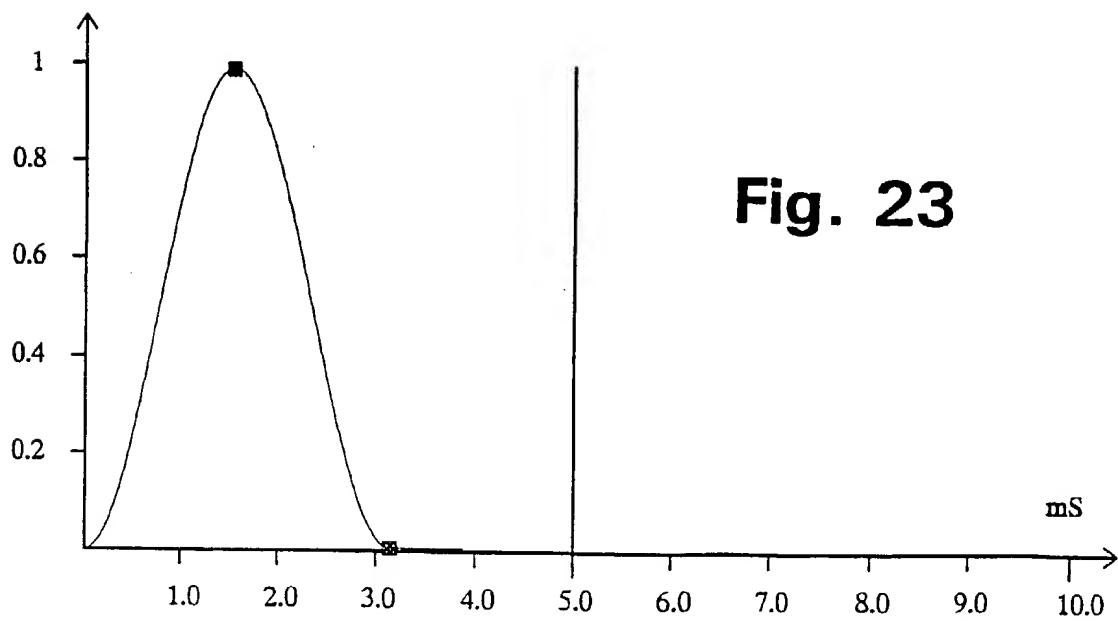
mS
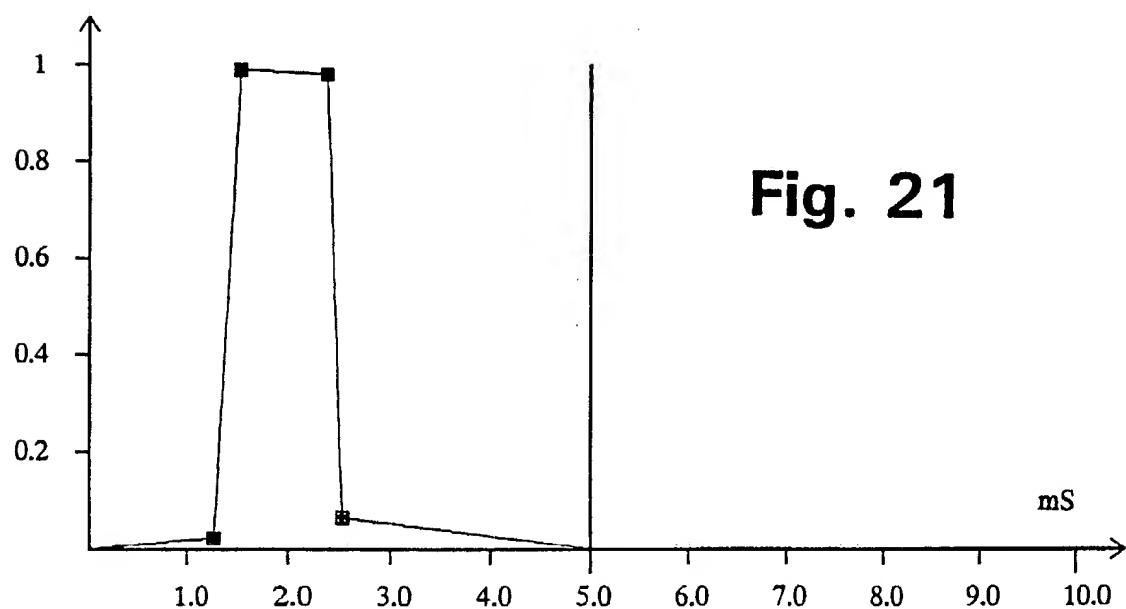
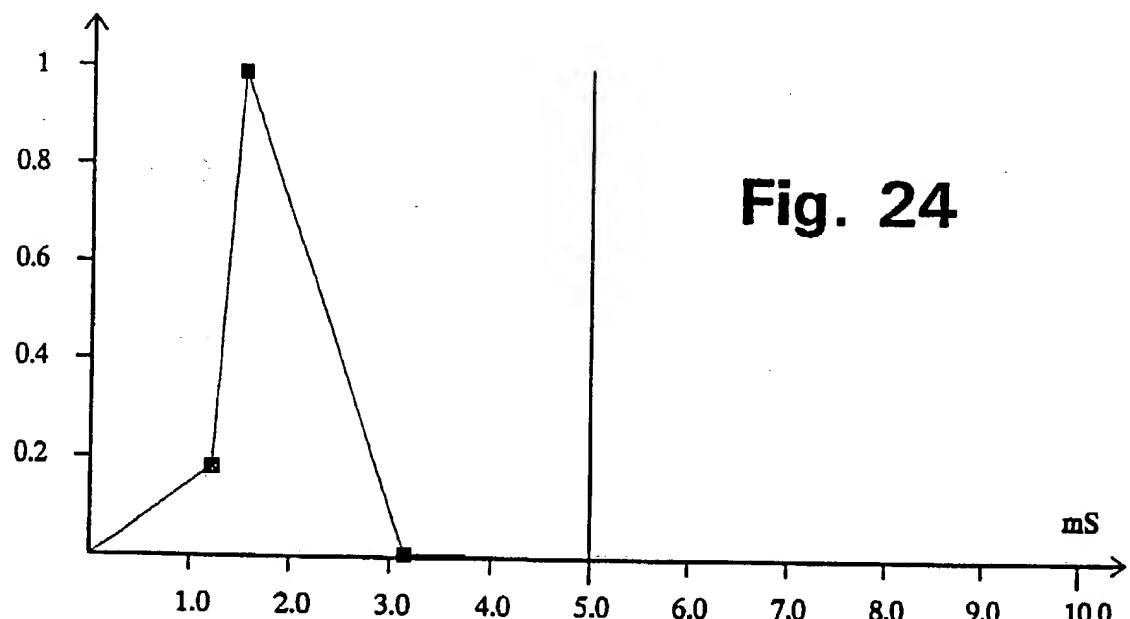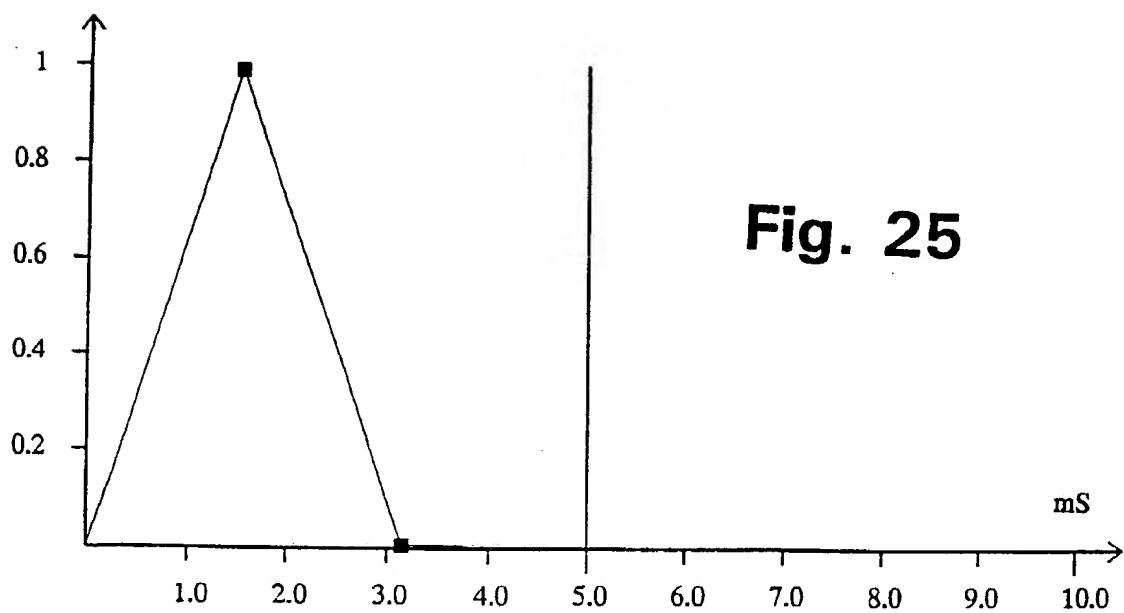Percept. Normalized.
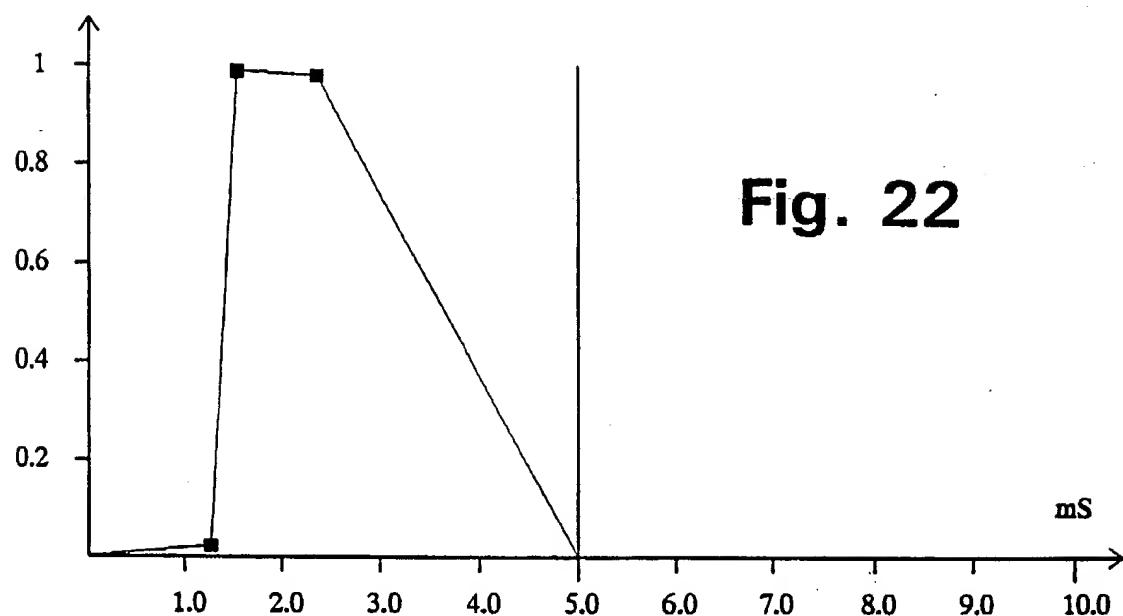
Fig. 22

Percept. Normalized.

Fig. 23

Percept. Normalized.

Fig. 24

Percept. Normalized.

Fig. 25